



3.0 LP 6/XX

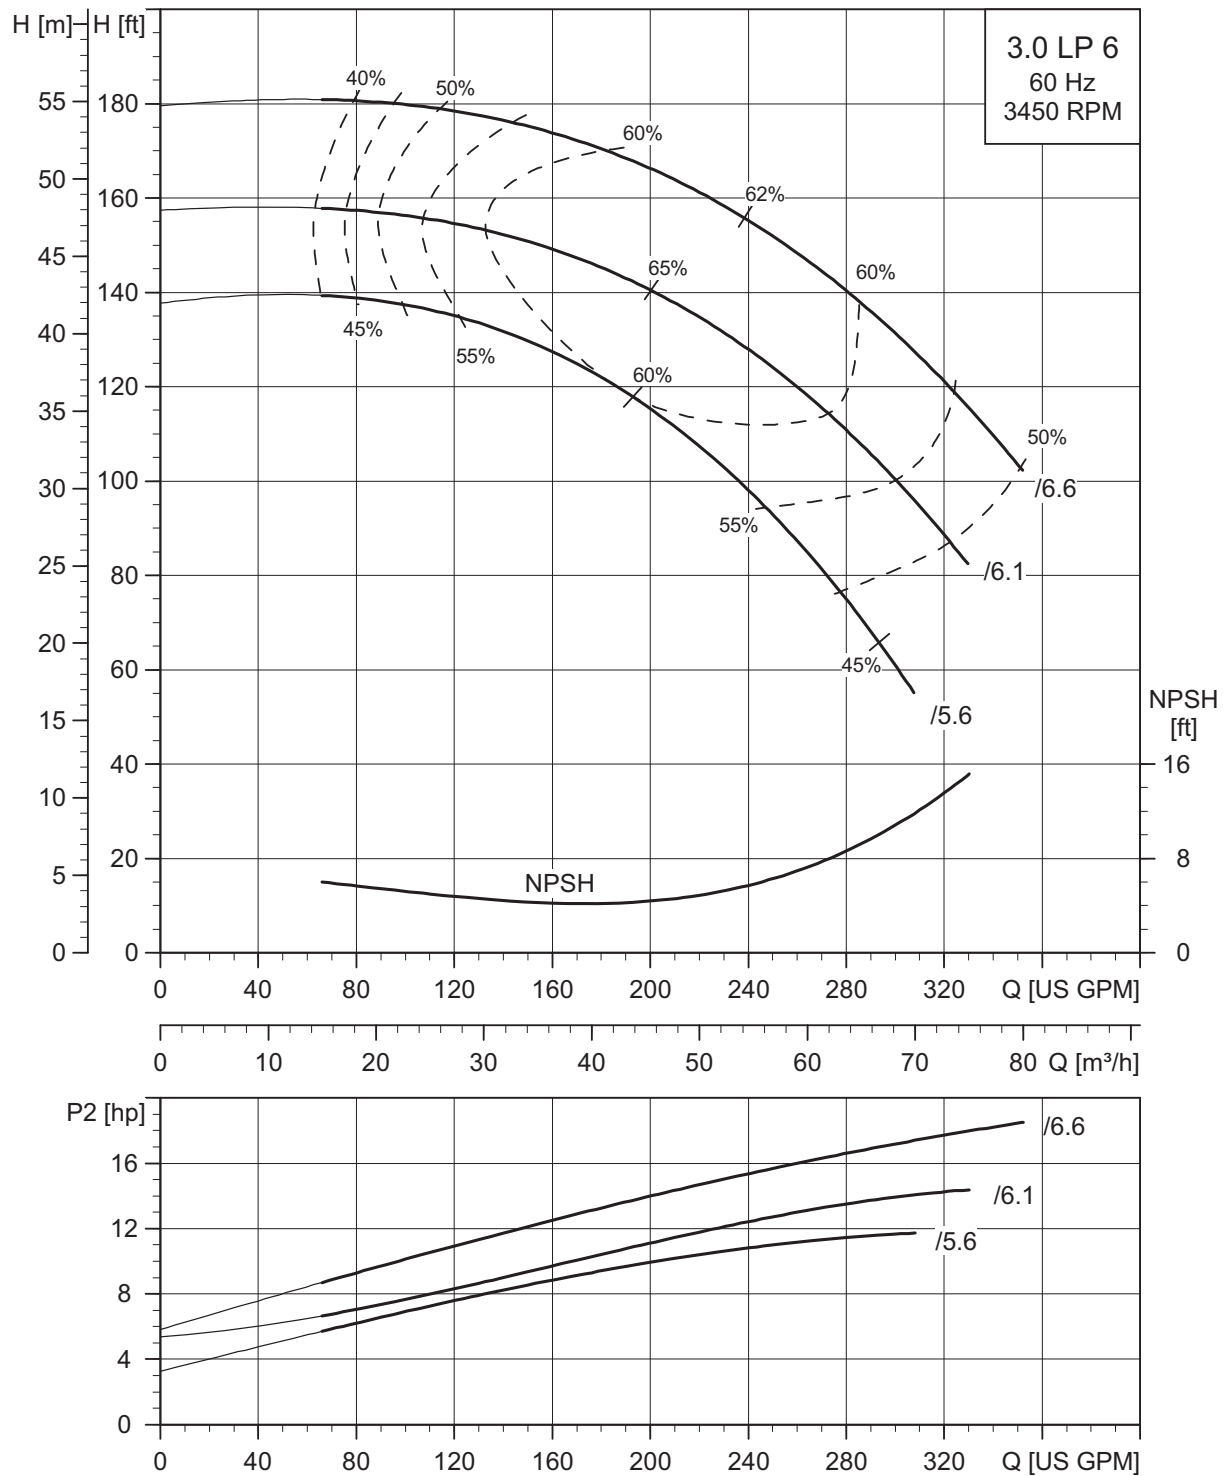

TM02 4974 0211

3.0 LP 6/XX

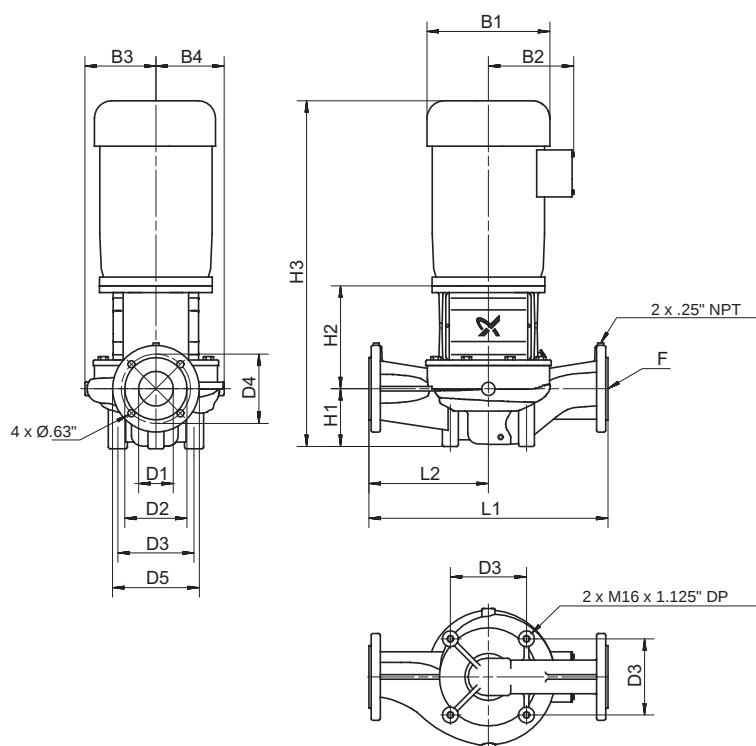

TM02 4965 1902

Electrical data, weights and dimensions

Pump type	Hp	Mtr S.F.	Ph	NEMA Frame size	Volts	Dimensions [inches (mm)]														Ship. wt. [lbs]
						D1	D3	D4	D5	B1	B2	B3	B4	H1	H2	H3	L1	L2		
3.0 LP 6/5.6	15	1.15	3	254TC	208-230 460/575*	3.00 (76)	6.63 (168)	6.00 (152)	7.50 (191)	10.23 (260)	8.69 (221)	6.19 (157)	5.94 (151)	5.13 (130)	8.44 (214)	30.38 (772)	21.00 (533)	10.50 (267)	312	
3.0 LP 6/6.1	15	1.15	3	254TC	208-230 460/575*	3.00 (76)	6.63 (168)	6.00 (152)	7.50 (191)	10.23 (260)	8.69 (221)	6.19 (157)	5.94 (151)	5.13 (130)	8.44 (214)	30.38 (772)	21.00 (533)	10.50 (267)	312	
3.0 LP 6/6.6	20	1.15	3	254TC	230/460, 575*	3.00 (76)	6.63 (168)	6.00 (152)	7.50 (191)	13.26 (337)	9.49 (241)	6.19 (157)	5.94 (151)	5.13 (130)	8.44 (214)	33.76 (858)	21.00 (533)	10.50 (267)	415	

Technical data

Nominal flow range	65 - 350 U.S. gpm
Min. flow rate	25 U.S. gpm
Head range	55 - 180 ft
Motors	TEFC (standard); ODP (optional)
Temp. range [°F (°C)]	+5° to +250° (-15° to +121°)
Max. working pressure	175 psi
Flanges:	2 1/2" ANSI 125 lb. F.F.

*575V available on request.