

MICROPlumb® PRODUCTS Solenoid Kit

MCR 208-A



► Description

24 VAC retrofit solenoid kit. Installs on most Acorn, Bradley, Metcraft and Willoughby mechanical lavatory valves. Used in conjunction with MICROPlumb® control modules to provide accurate control of lavatory or shower run times.


► Specifications

- 24 VAC – 60 Hz operating voltage
- Current In Rush: 13 VA
Holding: 9 VA
- 160°F maximum water temperature
- Pilot operated
- Integrated Screen Filter
- Dual O-Rings
- Includes 15' cord w/6 position, 4 pin RJ-11 connection
- Knurled Locknut w/1.125" – 18 UNEF-2B thread

► Accessories

- ETF 1003-240 20' Extension Cord Kit

NOTE: Solenoid cable length can be increased to a maximum overall length of 200 feet using MICROPlumb® extension cords.

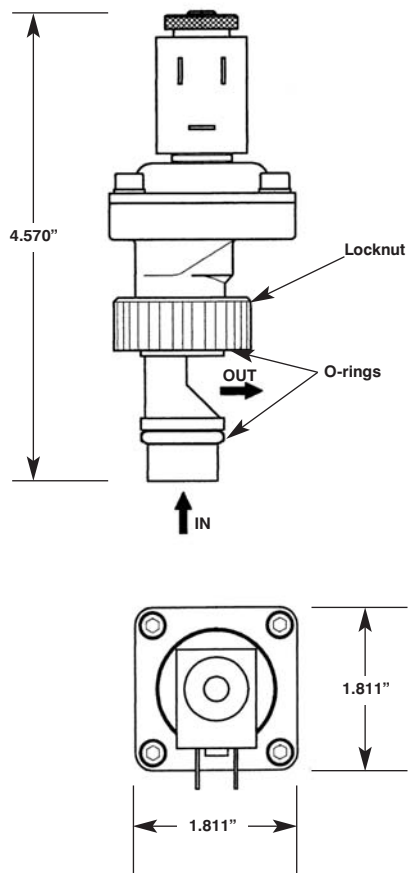

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

PWT® **PROGRAMMED WATER TECHNOLOGIES**
A SLOAN VALVE COMPANY

10500 Seymour Avenue • Franklin Park, Illinois 60131-1259
Phone 800-671-6970 • Fax 847-671-6944