

The Model 67, B67 & RB67 are automatic draining, freezeless wall hydrants with hose connection Backflow Protection. Hydrants drain as handle is shut off, *even if hose is attached*. All models are intended for irrigation purposes and blend in with modern architecture for installation on restaurants, schools, office buildings, churches, apartments, motels, stores, shopping centers and industrial buildings.


**SPECIFICATIONS:**

**HOSE CONNECTION BACKFLOW PREVENTER –**

- NIDEL® Model 37HA with 3/4 inch male hose thread
- ASSE Standard 1052 approved
- IAPMO® listed
- Field Testable
- Two check valves

**FEATURES:**

- Permanent type brass valve body with hemispherical seating surface.
- One piece valve plunger accurately controls both flow and drainage with a minimum number of turns and without need for adjustments.
- Drains under nozzle away from hands of operator and with a lip to divert water away from building.
- Copper casing tubes.
- No Lead Solder on all solder joints.
- Hardened stainless steel stem resists damage.
- Loose key operates hydrant.
- 3/8" solid brass operating rod.
- Four inlet options (See below)
- Wall clamp furnished on all 60 series except close coupled.
- Max Pressure: 125 p.s.i.
- Max Temperature: 120° F

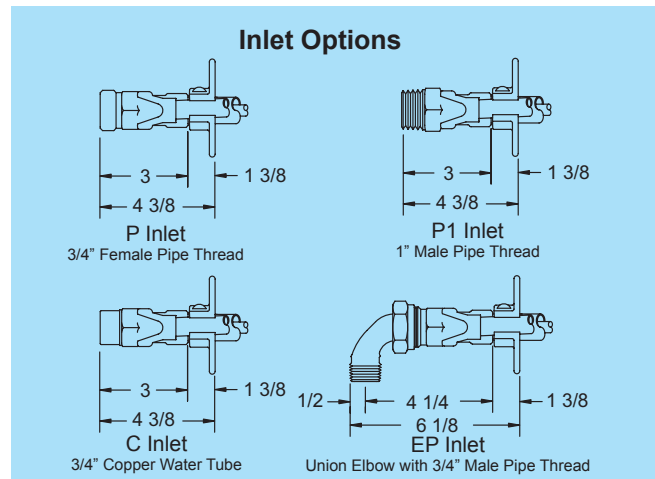

**Specify as follows:**

Wall hydrant shall be Woodford Model 67 (exposed type), B67 or RB67 (concealed box type), automatic draining with double check backflow preventer. ASSE Standard 1052 approved. 3/4" inlet and outlet (specify type of inlet). Hardened stainless steel operating stem and one-piece valve plunger to control both flow and drain functions. Exterior finish to be Chrome Plated (options: Polished Brass or Rough Brass). Loose tee key to be furnished with each hydrant. Wall thickness to be \_\_\_\_\_ inches.

**For Installation / Troubleshooting Instructions go to [www.woodfordmfg.com](http://www.woodfordmfg.com) or call 1-800-621-6032**

**When ordering, specify model, inlet and wall thickness**

WOODFORD



**Backflow Protected  
Freezeless Wall Hydrants  
Model 67/B67/RB67**



**MODEL 67**

Exterior Finish:  
Standard - Chrome (CH)  
Optional - Brass (BR) Polished Brass (PB)  
Fits one standard modular brick course.



**MODEL B67**

Exterior Finish: Box & Door  
Standard - Chrome (CH)  
Optional - Brass (BR) Polished Brass (PB)  
Anodized Aluminum Box (AL)  
Fits two std. modular brick course or one course of facing tile.



**MODEL RB67**

Exterior Finish: Box & Door - Chrome (CH) Only  
Designed especially for tilt-up wall construction.  
Install through 6" diameter hole.  
Two 3/8"-16 tapped holes for all-thread anchors in back of box.  
Lift and latch door stays open when hydrant is in use.