

SPECIFICATIONS

AERATOR KIT 1.75 GPM

Description

- Flow rate at 1.75 gallon per minute
- Female or male thread available
- Insert provided by Neoperl (see the number in brackets below)
- Rolling printed "A112.18.1M, 1.75 GPM / 6.6 LPM Max"
- Pressure compensating between 20 psi and 80 psi

Standards

MEETS ASME
A112.18.1M

- ASME A112.18.1M


Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Model Numbers:



DA500184N (42.3061.0.000)	1.75 GPM, junior, male, bubble, no wrench included
DA500186N (40.2061.0.0001)	1.75 GPM, standard, female, bubble, no wrench included
DA500210N (40.2061.0.0001)	1.75 GPM, standard, male, bubble, no wrench included
DA500188N (40.2061.0.0001)	1.75 GPM, standard, female, bubble, no wrench included
DA613086N (40.2061.0.0001)	1.75 GPM, standard, male, bubble
DA613085N (42.3061.0.000)	1.75 GPM, junior, male, bubble
DA613087N (31.2013.1)	1.75 GPM, standard, female, bubble
DA613089N (31.2013.1)	1.75 GPM, junior, male, bubble
DA613088N (31.2013.1)	1.75 GPM, standard, male, bubble

Flow Rate

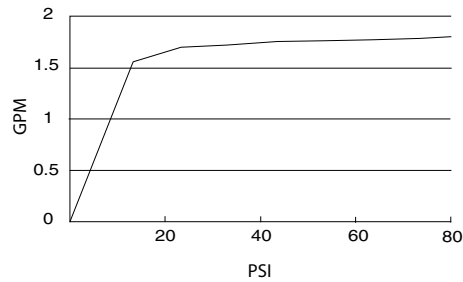

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

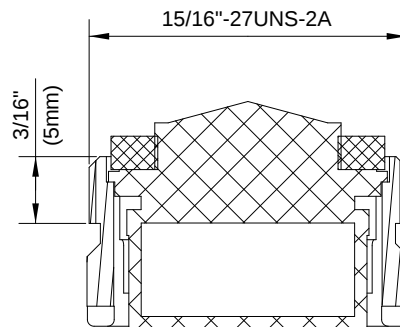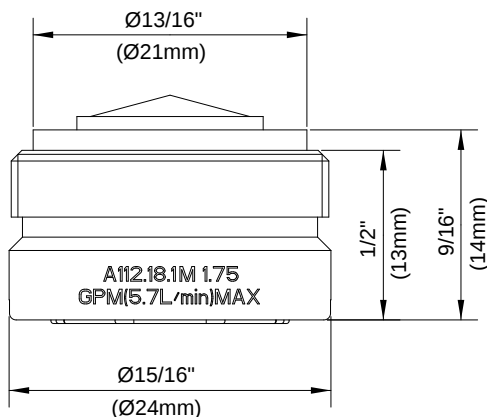

Submittal Information:

Job Name: _____
Contractor: _____

Location: _____
Contact #: _____