


CERTIFIED LEAD FREE 400 SB Series

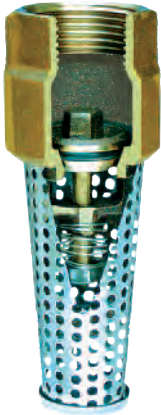

CERTIFIED LEAD FREE Foot Valve

- Silicon bronze cast body.
- Silicon bronze cast poppet.
- Stainless Steel Perforated Strainer.
- Female threads

MADE IN U.S.A.



| Part No. | Size | Weight Each lbs. | Carton Quantity |
|----------|-------|------------------|-----------------|
| 452SB | 3/4 | .5 | 1 |
| 453SB | 1 | .8 | 1 |
| 404SB** | 1 1/4 | 1.0 | 1 |
| 454SB | 1 1/4 | 1.1 | 1 |
| 455SB | 1 1/4 | 1.3 | 1 |
| 456SB | 1 1/2 | 1.7 | 1 |
| 457SB | 2 | 3.0 | 1 |
| 458SB | 2 1/2 | 7.0 | 1 |
| 459SB | 3 | 9.2 | 1 |
| 460SB | 4 | 18.7 | 1 |
| 461SB | 6 | 33.5 | 1 |

**404SB enters 2" pipe



CERTIFIED LEAD FREE Foot Valve

- Silicon bronze cast body.
- Silicon bronze cast poppet.
- Stainless Steel Perforated Strainer.
- Dual purpose threads.

MADE IN U.S.A.



| Part No. | Size FxM | Weight Each lbs. | Carton Quantity |
|----------|---------------|------------------|-----------------|
| 465SB | 3/4 x 1 | .4 | 1 |
| 466SB | 1 x 1 1/4 | .8 | 1 |
| 467SB | 1 1/4 x 1 1/2 | .9 | 1 |



CERTIFIED LEAD FREE Foot Valve

- Silicon bronze cast body.
- Silicon bronze cast poppet.
- ABS plastic strainer.
- Female threads.
- Dual threads on 487SB.

MADE IN U.S.A.



| Part No. | Size | Weight Each lbs. | Carton Quantity |
|----------|-----------|------------------|-----------------|
| 483SB | 1 | .8 | 1 |
| 487SB | 1 x 1 1/4 | .8 | 1 |



CERTIFIED LEAD FREE Suction Strainer

- Silicon bronze cast body.
- Stainless Steel Perforated Strainer.
- Female threads.

MADE IN U.S.A.



| Part No. | Size | Weight Each lbs. | Carton Quantity |
|----------|-------|------------------|-----------------|
| 490SB | 3/4 | .5 | 1 |
| 491SB | 1 | .6 | 1 |
| 492SB | 1 1/4 | 1.1 | 1 |
| 493SB | 1 1/2 | 1.5 | 1 |
| 494SB | 2 | 2.6 | 1 |
| 495SB | 2 1/2 | 6.2 | 1 |
| 496SB | 3 | 8.1 | 1 |
| 497SB | 4 | 14.7 | 1 |
| 489SB | 6 | 32.0 | 1 |

*Silicon bronze components contain less than .05% (1/20 of 1%) Lead.

All foot valves furnished with Buna-N O-Ring, stainless steel spring and stainless steel locknut.
 All valves 3/4" through 1-1/2" have a working pressure of 400 psi. All valves 2" and larger have a working pressure of 600 psi.
 190° F. Maximum Temperature Rating