




LAMBRO INDUSTRIES, INC.

Ventilation Accessories Since 1967

INSTRUCTIONS FOR ROOF VENT INSTALLATIONS

Check with local building codes before installation.


DO NOT INSTALL ON A FLAT ROOF - DESIGNED FOR SHINGLED ROOFS

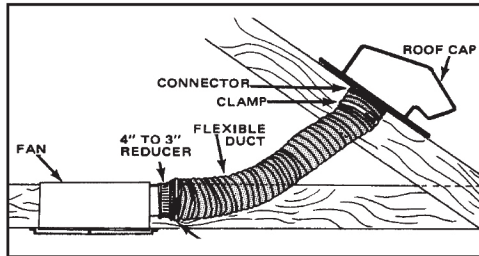


Step 1: Determine the location of the vent.

If you are replacing a roof where ventilation was installed, skip to the next step.


If the vent is a kitchen or bathroom exhaust, it should be placed as close to that exhaust outlet as possible. This will allow for maximum performance when exhausted from the outside vent.

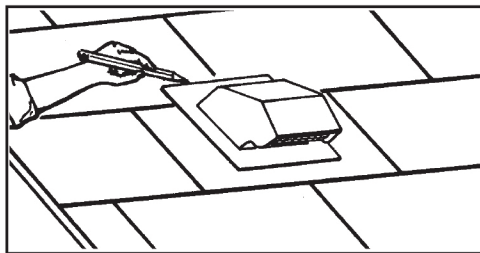

Step 2: Trace the outline of the flange onto the shingles. Cut a hole through the roof decking slightly larger than the diameter of the duct.

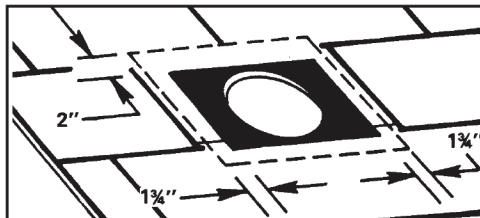

Step 3: Trim the shingles to fit snugly around the three sides of the vent. Attach the duct to the vent using a clamp or approved duct tape. Route the duct through the hole through the decking from the outside and seat the vent flush to the roof surface.

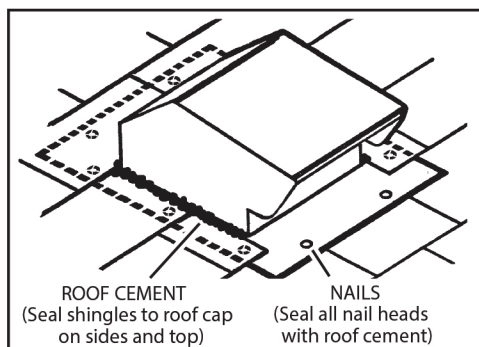

Step 4: Carefully lift the shingles while sliding back the flange under the lifted shingles. Nail the flange to the roof on top and two sides. Nail the bottom on top of the shingles directly to the roof. Use roofing cement to seal the shingles to the top and two sides of the vent to prevent leakage. Seal the nail heads using roofing cement.

Trim the duct length as necessary and secure it to the exhaust outlet using a clamp or approved duct tape.

Test the exhaust vent to ensure it's working correctly.

NOTE: Clothes dryer applications require the screen to be removed.

115 Albany Ave., Amityville, NY 11701
(631) 842-8088
sales@lambro.net
www.lambro.net