

see what Delta can doSM

BATHROOM FAUCET

- Ara[®] Bath Collection
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa, stream straightener type flow
- GPM indicates max flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa, stream straightener type flow
- HGM indicates max flow rate 0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa, stream straightener type flow
- One or three-hole mount (escutcheon included)
- Diamond coated ceramic cartridge
- 1/4" O.D. straight, staggered PEX supply lines
- Optional red/blue indicator ring provided with model
- Models have metal drain with push pop-up type fitting with plated flange and stopper, no lift rod hole
- Solid metal fabricated spout


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A 112.18.1 / CSA B125.1
- ASME A 112.18.2 / CSA B125.2
- NSF/ANSI/CAN 61 & 372
- EPA WaterSense[®] - applies to 567LF-MPU, 567LF-TP, 567LF-GPM-MPU only
- ICC/ANSI A117.1

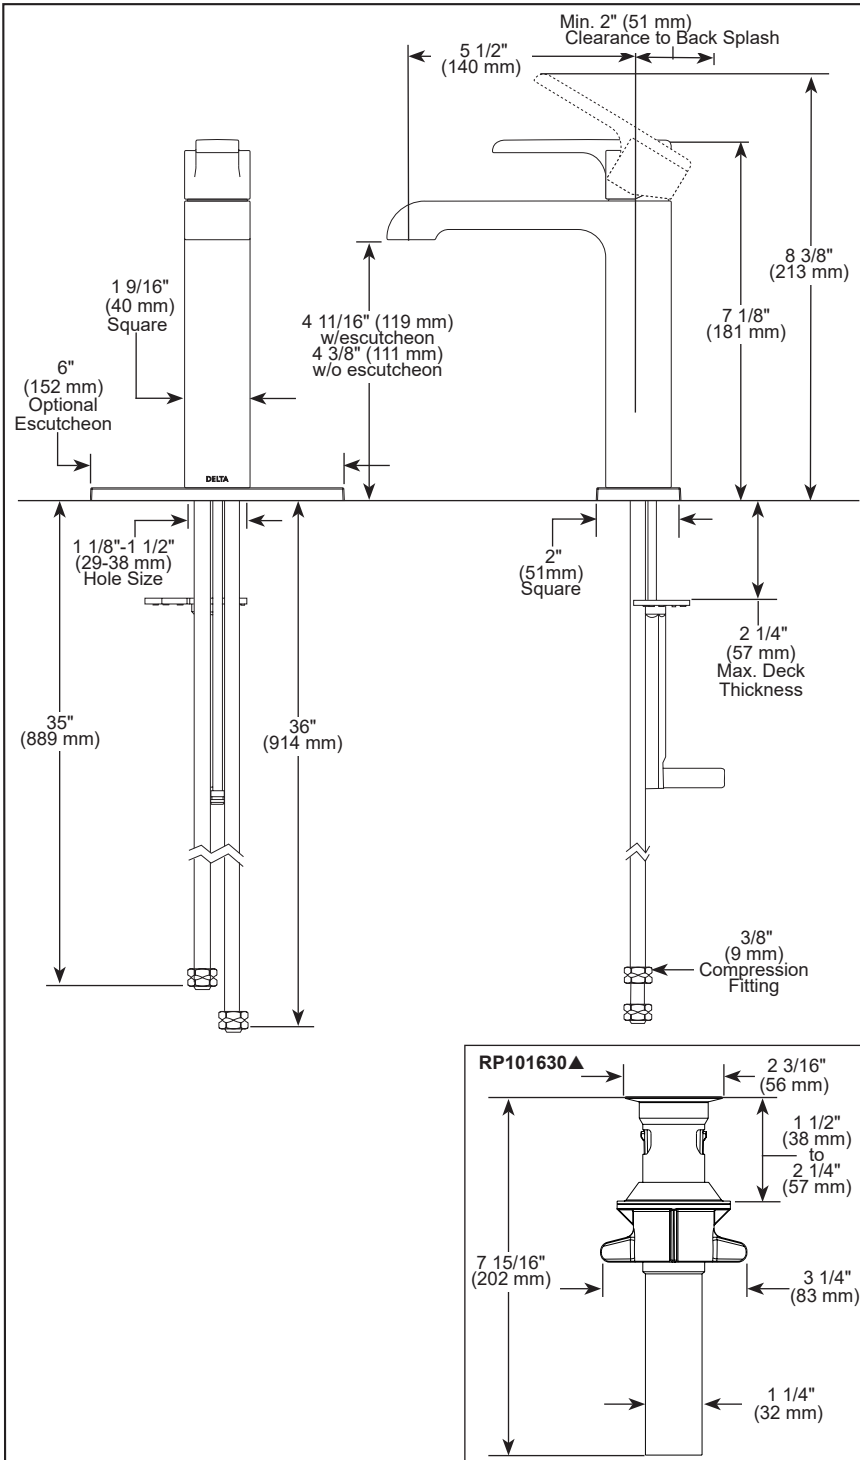

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-567LF-MPU Rev. L

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Delta Faucet Company