MOEN®

Specifications

DESCRIPTION
- Metal construction with various finishes identified by suffix
- Designed to be installed through 2, 1-1/4" and 1, 1" min. dia. holes 8" on center
- 1/2" copper connections
- Adaptable for non-8" centers

OPERATION
- Maximum handle rotation angle is 90˚ to full on for either handle
- Rotate hot side counterclockwise to open and clockwise to close
- Rotate cold side clockwise to open and counterclockwise to close


FLOW
- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  ° 1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE
- 1224 cartridge design nonmetallic/nonferrous and stainless steel material

STANDARDS
- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** for lever handles

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

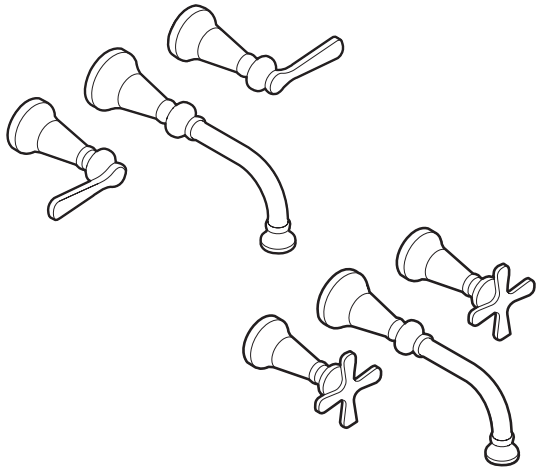



COLINET™
Two-Handle Wall Mount Faucet

Models: TS44104 series (Lever Handle)
TS44105 series (Cross Handle)

Valve: 9700

WaterSense · Meets EPA Criteria · Certified by IAPMO R&T

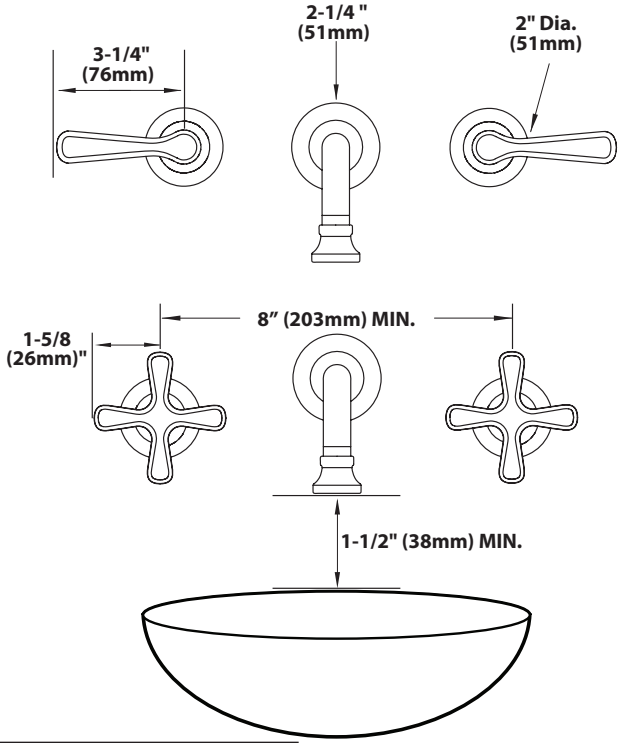

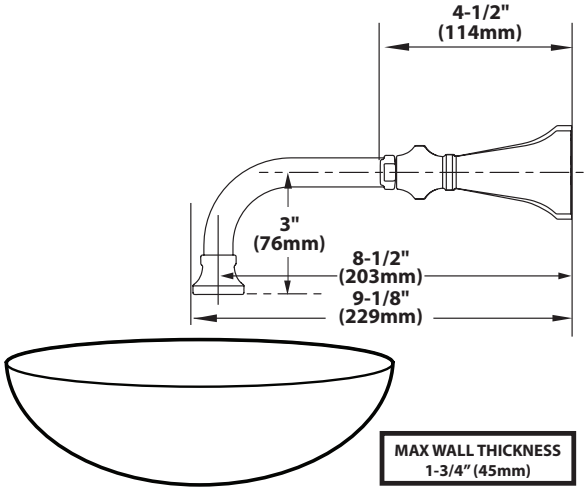

M•pact System

CRITICAL DIMENSIONS
(DO NOT SCALE)