MOEN®

Specifications

FAUCET DESCRIPTION
- Metal construction with various finishes identified by suffix


OPERATION
- Handle operates counterclockwise through a 270˚ arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

CARTRIDGE
- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS
- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- **ADA** for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations

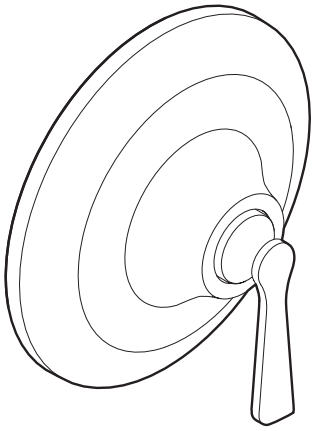


COLINET™ POSI-TEMP®
Single-Handle Tub/Shower Trim Kit

Model: TS44201 series - valve only trim

Valves: 62300 and 2500 series

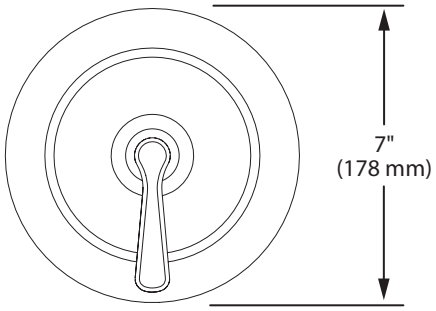

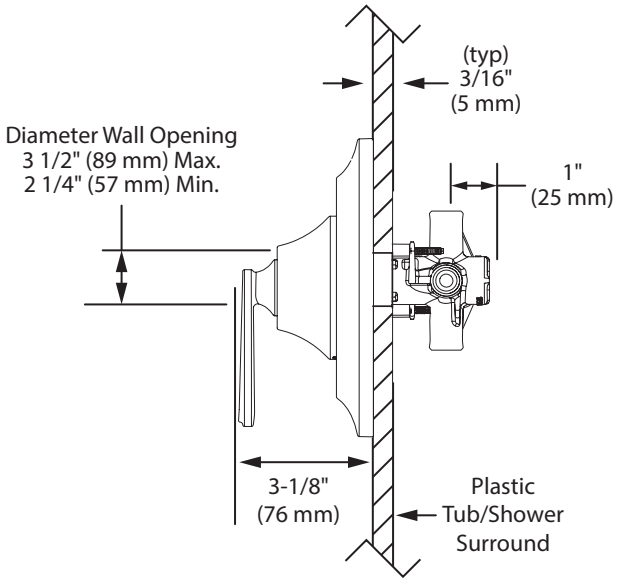

M•pact System

CRITICAL DIMENSIONS
(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-289-6636
www.moen.com