MOEN®

Specifications

DESCRIPTION
- Metal construction with various finishes identified by suffix
- Single function handshower with double check valves


OPERATION
- Lever and cross style handles
- Rotate hot side handle counterclockwise to open (clockwise to close)
- Rotate cold side handle clockwise to open (counterclockwise to close)

FLOW
- Hand shower meets 1.75gpm max (6.6 L//min) @ 80 psi

STANDARDS
- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- **ADA** for lever handles

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

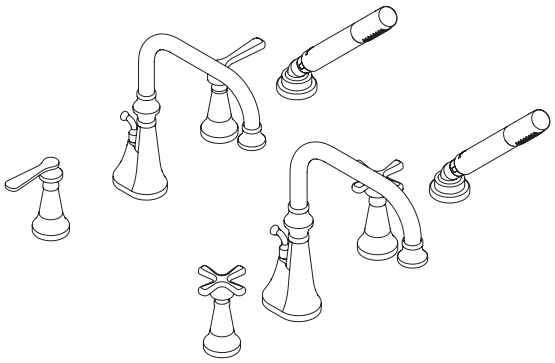


COLINET™

Two-Handle Roman Tub Faucet Trim w/ Built In Diverter Valve

Models: TS44504 series (lever handle)
Models: TS44506 series (cross handle)
Valves: 9792, 9793

WaterSense Meets EPA Criteria
Certified by IAPMO R&T

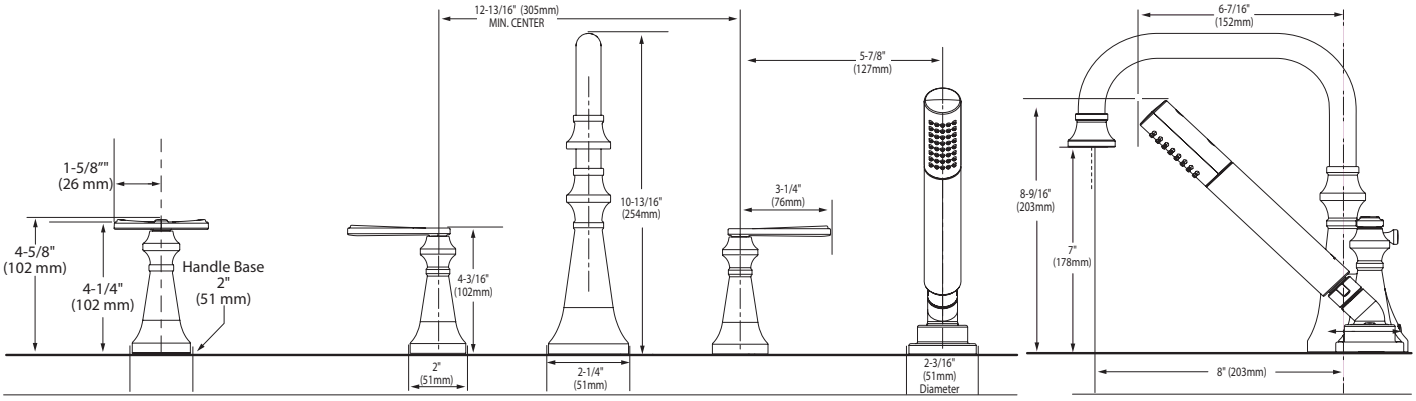

M•pact™ System

CRITICAL DIMENSIONS

(DO NOT SCALE)