


American Standard



**American Standard is devoted to making life,
in the heart of your home, better every day...**

...so, thank you for inviting us in! With the very best in kitchen and bathroom products, we are here to help make your life happier, healthier and simpler. Our commitment to quality, innovation and performance has made us part of your everyday routine for nearly 150 years, and we look forward to being a part of your life for many years to come.

Learn more at www.AmericanStandard.com

REGISTER YOUR WARRANTY

Try the easy-scan **QR code** to quickly enter your information or find your product's detailed warranty here:

www.AmericanStandard.com/warranty



Registering allows you to keep your product information safe, and us the ability to contact you in the event of a product recall or *any* news about your purchase.

And if ever you have a question or need help...?


Call us at 1-855-815-0004

OWNERS MANUAL

Spectra Versa™ Diverter Replacement

103133XXX0


For use with shower heads rated at 4.9 L/min (1.3 gpm) or higher

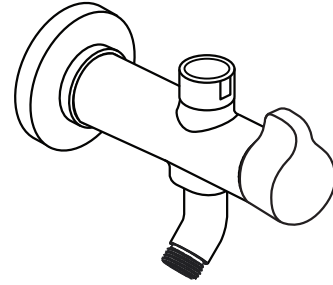

INSIDE THE BOX

Image shown may vary from product purchased.

Diverter

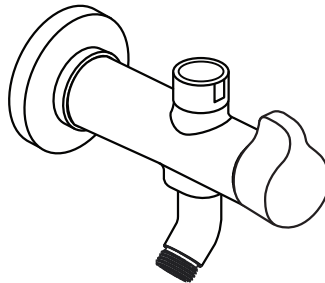

RECOMMENDED TOOLS

Installation steps will indicate which tools should be used with associated letter



Level

A



Adjustable
Wrench


B

INSTALLATION INSTRUCTIONS

1

PREPARE THE SHOWER BAR FOR REMOVAL

1. Unthread the hand shower HOSE (1) from the DIVERTER (2).
2. **Optional:** Remove the shower head so that the detached shower bar is more manageable.

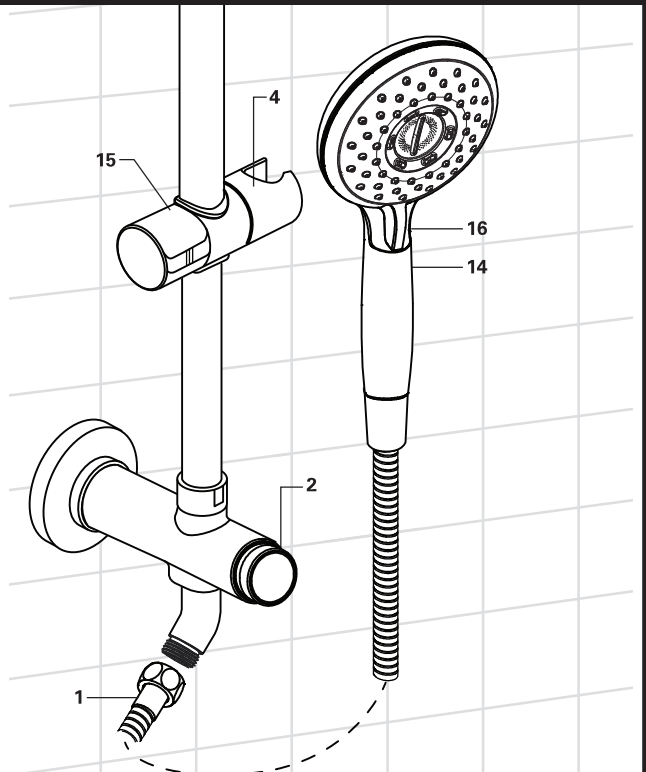


B

2

REMOVE THE SHOWER BAR FROM THE WALL

1. Slide top and bottom ESCUTCHEON (1) and (2) forward so that the SET SCREWS (3) are accessible.
2. Unthread SET SCREWS (3).
3. Pull the SHOWER BAR (4) off the wall.

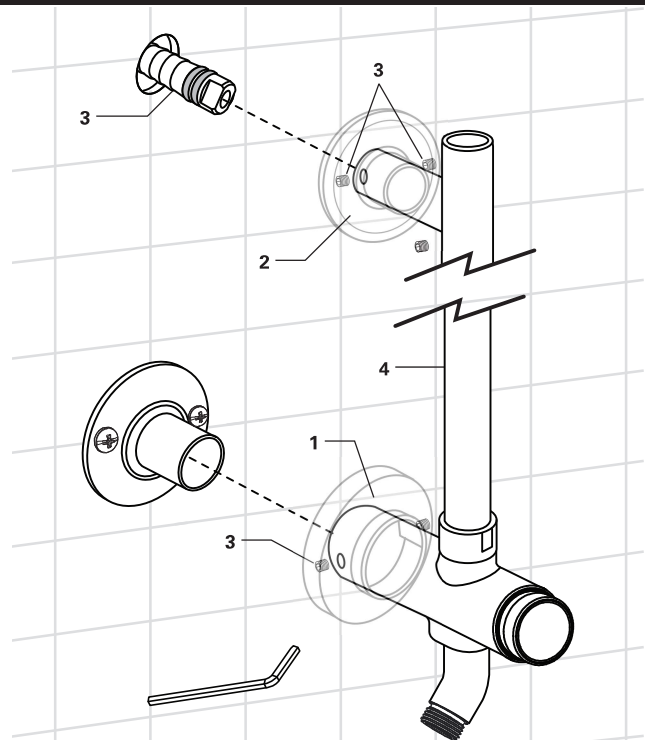

C

3

REPLACE OLD DIVERTER

1. Unthread DIVERTER NUT (1) and remove the OLD DIVERTER (2).
2. Thread the NEW DIVERTER (3) on to the shower bar.
3. Reverse the steps in this document to reinstall the shower bar on to the wall.

