


PureLink® Plus Blue Stripe PEX-a Tubing - Coils 20000 Series

High molecular crosslinked polyethylene (PEX) with minimum bending radius of 6× the diameter at 68°F (20°C). Maximum operating temperature 180°F @ 100 psi (82°C @ 7 bar). Blue printing for identification of cold water lines. The PureLink® Plus PEX-a tubing may be used with fittings that are compliant with ASTM F1807/F1960/F2080/F2098/F2159 standards.

For complete specifications, see submittal [SUB20000](#).

Minimum bending radius @ 68°F (20°C) for:

- ½" = 3" (77 mm)
- ¾" = 4-½" (115 mm)
- 1" = 6" (153 mm)

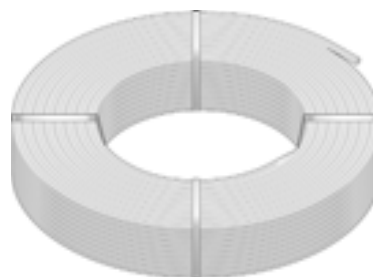

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
20105	½" 100ft Blue PureLink® Plus UV Stabilized PEX-a PexCube™	6	96	coil	\$ 70.641
20305	½" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	48	coil	\$ 211.933
20505	½" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	32	coil	\$ 353.225
20905	½" 1000ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	coil	\$ 706.450
20122	¾" 100ft Blue PureLink® Plus UV Stabilized PEX-a PexCube™	3	60	coil	\$ 121.714
20322	¾" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	21	coil	\$ 365.142
20522	¾" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	12	coil	\$ 608.570
20128	1" 100ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	28	coil	\$ 233.815
20328	1" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	11	coil	\$ 701.435

For sizes 1-¼" and larger, please see [page 87](#).

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
20205	½" 20×20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 282.576
20222	¾" 10×20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 243.428
20228	1" 5×20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 233.815

For sizes 1-¼" and larger, please see [page 87](#).