

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fittings adapts PEX tubing to male NPT thread.

Qty	PEX Size	NPT Size	Stk. #	Dimension				Weight
				A	B	C	D	
	1/2"	1/2"	68005	1 3/4" (44 mm)	5/8" (15.5 mm)	1" (26 mm)	1 5/16" (24 mm)	0.18 lb 80 g
	5/8"	3/4"	68019	1 13/16" (46 mm)	1 1/16" (16.5 mm)	1 5/16" (33 mm)	1 3/16" (30 mm)	0.3 lb 135 g
	3/4"	3/4"	68022	1 13/16" (45.5 mm)	1 1/16" (16.5 mm)	1 7/16" (36 mm)	1 1/4" (32 mm)	0.33 lb 150 g
	1"	1"	68028	1 15/16" (49 mm)	1 1/16" (17 mm)	1 3/4" (44 mm)	1 1/2" (38 mm)	0.47 lb 215 g


Technical Data

Specifications

Material	Brass (JIS C-3604)
Operating Temperature	180°F (82.2°C)
Operating Pressure	0.69 MPa / 100 psi

Standards / Listings

Manufactured to B137.5 & F-877

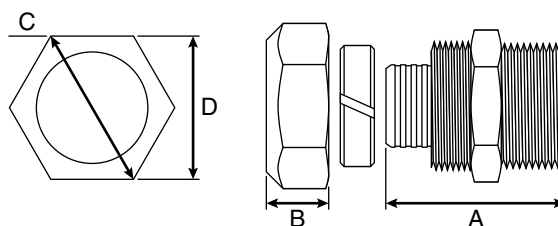

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Heating Warranty