

SPECIFICATIONS

ANTIOCH™ TWO HANDLE CENTERSET LAVATORY FAUCET

Model

D301022

Description

- Ceramic disc valves
- 4 1/2" spout length, laminar flow
- With 50/50 touch-down drain assembly
- 3 hole mount
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 20 - 80 psi

Standards



Certified to NSF/ANSI 61
Section 9

- NSF 61-9
- Energy Policy Act of 1992



NSF/ANSI 372

- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372




- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty




Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate

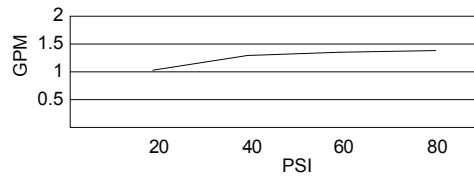

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

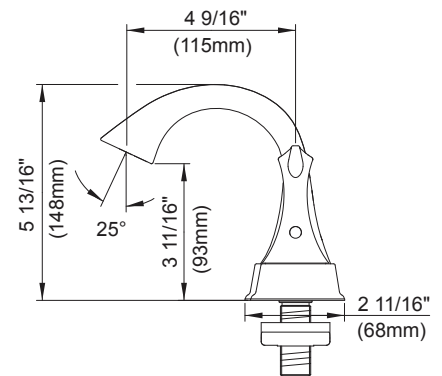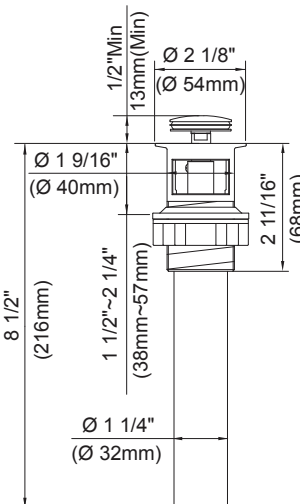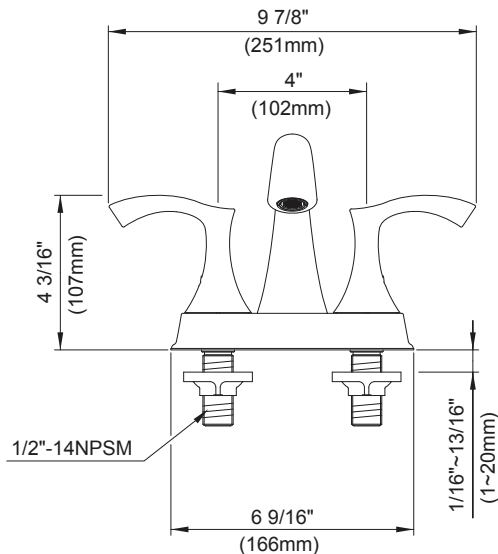

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____