

see what Delta can do™

## BATHROOM FAUCETS

- Trinsic® Bath Collection
- Single Handle Deck Mount

### STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa, laminar type flow
- GPM indicates max 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa, laminar type flow
- HGM indicates max 0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa, laminar type flow
- 1 or 3-hole mount (escutcheon optional, included)
- Diamond coated ceramic cartridge
- 1/4" O.D. straight, staggered PEX supply tubes
- Solid metal body
- Models have metal drain with push pop-up type fitting with plated flange and stopper, no lift rod
- Optional red/blue indicator ring provided with model
- Models with suffix "LPU" are less pop-up


### WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.deltafaucet.com](http://www.deltafaucet.com) for the complete details of our limited warranty.



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- NSF/ANSI/CAN 61 & 372
- EPA WaterSense® - Applies to 559LF-▲MPU, 559LF-GPM-MPU & 559LF-▲LPU only
- ICC/ANSI A117.1

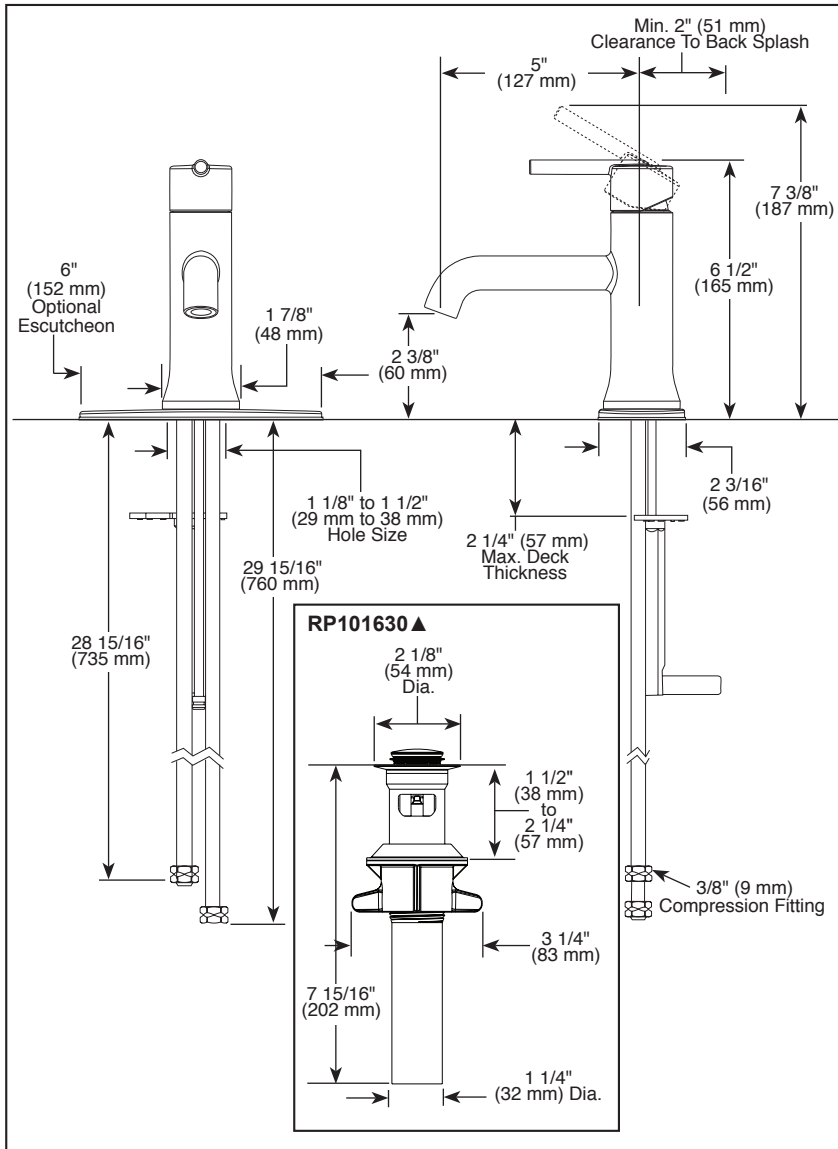

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-L-559LF-MPU Rev. J

### Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2025 Delta Faucet Company