

see what Delta can do™

# HYDRORAIN® SHOWER HEAD WITH HAND SHOWER

- H<sub>2</sub>Okinetic® 2-In-1 Shower
- 5-Spray Setting Hand Shower
- Certified Dual Check Valves

## FEATURES:


- Touch-Clean® Spray Holes
- H<sub>2</sub>Okinetic® PowerDrench® Spray
- MagnaTite® Docking
- Lumicoat® Finish (-PR models only)
- Lumicoat® Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

## STANDARD SPECIFICATIONS:

- Max. flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa (58680-▲, 58680-▲-PR & 58680-▲-R)
- Max. flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (58680-▲25, 58680-▲-PR25 & 58680-▲25-R)
- Certified dual check valves for backflow prevention
- Integrated hand shower docks securely into shower head when not in use
- 3-Way diverter allows for single or shared operation of the raincan and hand shower
- Multi-function hand shower and single function raincan
- Hand shower dial changes spray modes including a pause feature - a non-positive shut-off
- Raincan rotates 40° (20° per side) for adjustable coverage
- Ball connector swivel angle is 34° (17° per side)
- Lumicoat® is not applied to the shower hose
- 5 Spray settings include: H<sub>2</sub>Okinetic® PowerDrench® spray, Full Body spray, Massaging spray, Shampoo Rinsing spray, and Pause

## WARRANTY:

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.deltafaucet.com](http://www.deltafaucet.com) for the complete details of our limited warranty.

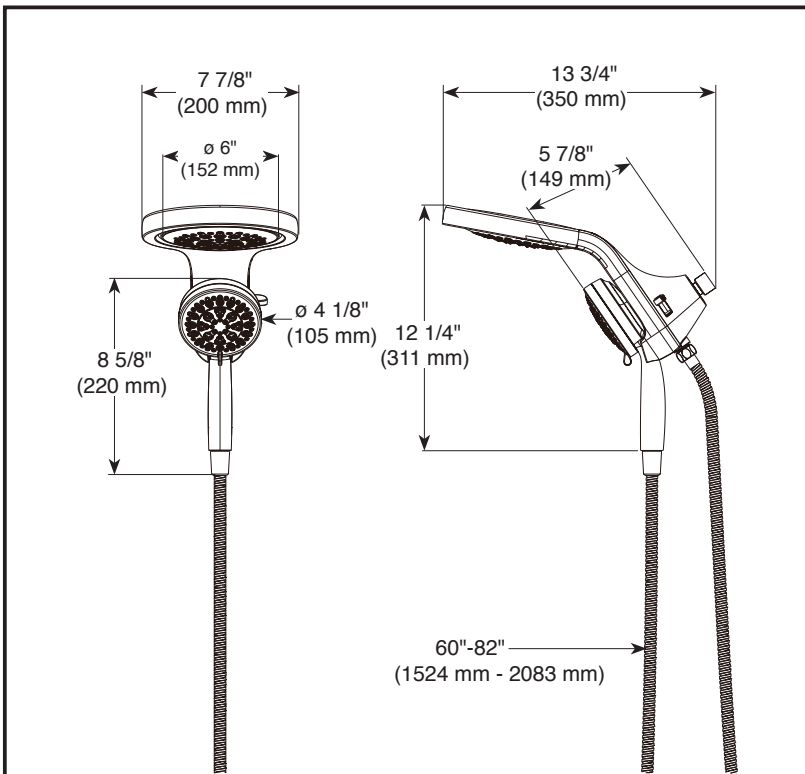

▲ Designate proper finish suffix



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1◆
- ASME A112.18.3◆
- EPA WaterSense® - Applies to 58680-▲, 58680-▲-PR & 58680-▲-R only
- ◆ Your Delta hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

## Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2025 Delta Faucet Company