


35 426 970



- pre-seal
- lead-free, dezincification resistant
- 2x back flow preventer
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm
- 3x female thread 1/2" outlet
- single flow function only

35 426 970

mm [inches]

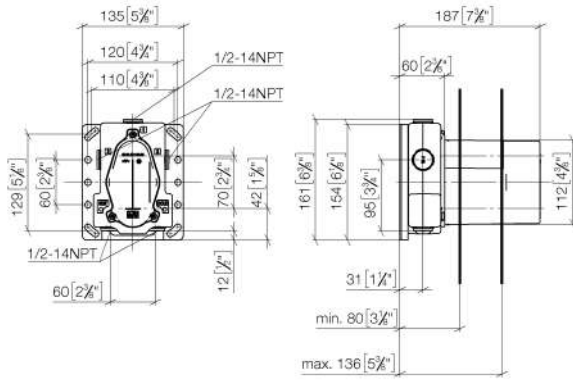

Codes & Standards

ASME A112.18.1 cUPC

Certificates and sustainability

IAPMO_4976 (

