



Accessories for Commercial PRVs


- Manufactured from Galvanized Steel (all models)
- Welded Corners (all models)
- Fiberglass Isolation to Deaden Sound (5ACC..FT and 5ACC..FS models)
- Shutter Flanges and 1-1/2" Wood Nailer (5ACC..FT models)
- Stamped Louvers on Curb Sides (5ACC..VC models)
- Flat Mounting Flange to Fasten Directly to Roof Deck
- UL762 Certified for Commercial Kitchen Applications (5ACC..VC models)

Technical parameters

Dimensions and weights

Weight 28 lb

Dimensions

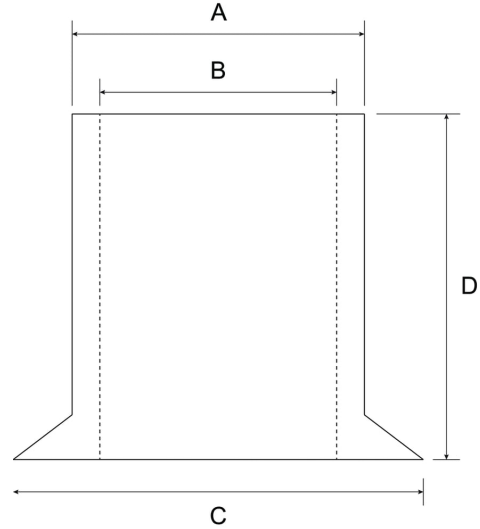

| Models | A | B | C | D |
|-----------|--------|--------|--------|---|
| 5ACC 15FS | 15 | 12 | 23 | 8 |
| 5ACC 17FS | 17 1/2 | 14 1/2 | 25 1/2 | 8 |
| 5ACC 19FS | 19 1/2 | 16 1/2 | 27 1/2 | 8 |
| 5ACC 20FS | 20 1/2 | 17 1/2 | 28 1/2 | 8 |
| 5ACC 24FS | 24 1/2 | 21 1/2 | 32 1/2 | 8 |
| 5ACC 28FS | 28 1/2 | 25 1/2 | 36 1/2 | 8 |
| 5ACC 32FS | 32 1/2 | 29 1/2 | 40 1/2 | 8 |
| 5ACC 40FS | 40 1/2 | 37 1/2 | 48 1/2 | 8 |
| 5ACC 44FS | 44 1/2 | 41 1/2 | 52 1/2 | 8 |

Dimensional information is in inches