



Accessories for Commercial PRVs


- Manufactured from Galvanized Steel (all models)
- Welded Corners (all models)
- Fiberglass Isolation to Deaden Sound (5ACC..FT and 5ACC..FS models)
- Shutter Flanges and 1-1/2" Wood Nailer (5ACC..FT models)
- Stamped Louvers on Curb Sides (5ACC..VC models)
- Flat Mounting Flange to Fasten Directly to Roof Deck
- UL762 Certified for Commercial Kitchen Applications (5ACC..VC models)

Technical parameters

Dimensions and weights

Weight	28 lb
--------	-------

Dimensions

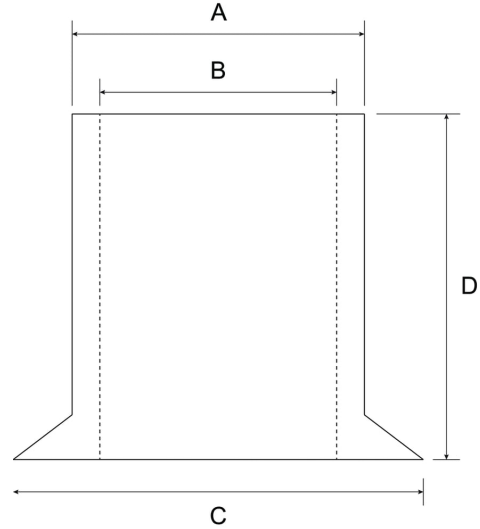

Models	A	B	C	D
5ACC 17FT	17 1/2	14 1/2	25 1/2	12
5ACC 20FT	20 1/2	17 1/2	28 1/2	12
5ACC 24FT	24 1/2	21 1/2	32 1/2	12
5ACC 28FT	28 1/2	25 1/2	36 1/2	12
5ACC 32FT	32 1/2	29 1/2	40 1/2	12
5ACC 40FT	40 1/2	37 1/2	48 1/2	12
5ACC 44FT	44 1/2	41 1/2	52 1/2	12

Dimensional information is in inches