

GEBERIT SIGMA60 ACTUATORS

For Sigma Concealed Tanks, 2x6 and 2x4 Installations

SPECIFICATIONS

Actuators for concealed tank and carrier system. Actuator flush plates and push buttons shall be glass, zinc die-cast, and plated to guard against scratches. For tile, stone or other hard surfaced walls only. All components shall be compliant with applicable codes and product standards.

FEATURES

- Designed to maintain appearance push after push
- Moving parts are accessible behind actuator flush plate
- Made of glass, zinc die cast and plated
- Available in a variety of unique combinations of finish/color
- Incorporates water saving possibilities when used with Geberit dual-flush tanks 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF) or 1.28 GPF (4.8 LPF) and 0.8 GPF (3 LPF)
- Includes mounting frame and hardware

WARRANTY

- One-year limited warranty.


Dual-Flush Actuators, Sigma 2x6 and 2x4 Installation




Style	Material	Finish	Model No.
Sigma60	Zinc	Brushed Chrome	115.640.GH.1
	Glass	White Glass	115.640.SI.1
		Black Glass	115.640.SJ.1
		Lava Glass NEW!	115.640.JK.1
		Grey Sand Glass NEW!	115.640.JL.1
	Rough-in set (REQUIRED accessory for Sigma 2x6 concealed tanks)		243.168.00.1
	Cover frame (optional accessory)		115.641.21.1
	Polished Chrome		
	Cover frame (optional accessory)		115.641.GH.1
	Brushed Chrome		

DIMENSIONS

Sigma60 Dual-Flush

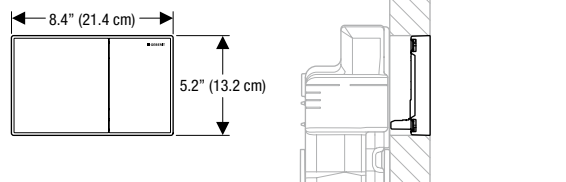

Sigma60 Cover Frame

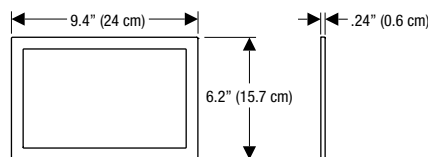

Products marked with  comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.



ARCHITECT/ENGINEER APPROVAL

Job Name: _____

Date: _____ Quantity: _____

Model Specified: _____

Variations Specified: _____

Customer/Wholesaler: _____

Contractor: _____

Architect: _____

**KNOW
HOW
INSTALLED**

Geberit
2100 S. Clearwater Drive
Des Plaines, IL 60018
USA

P 847-803-7777
F 847-849-1845

www.geberit.us