


Geberit electronic WC flush control, mains operation, for Sigma concealed cistern 12 cm,
with Sigma10 actuator plate, round, automatic / touchless / manual

■ GEBERIT

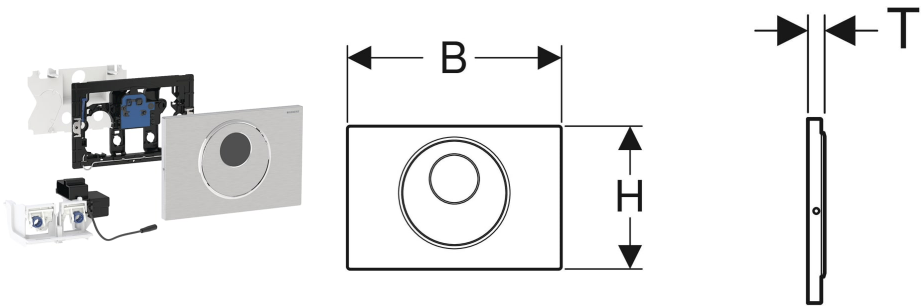

Example image

APPLICATION PURPOSES

- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for barrier-free construction

CHARACTERISTICS

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Manual flush actuation via actuator plate
- Flush actuation possible via external push-button
- Screwable actuator plate
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset
- Adjustable interval flush

- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Vandal-resistant

TECHNICAL DATA

Degree of protection	IP45
Nominal voltage	85–240 V AC
Operating voltage	12 V DC
Mains frequency	50–60 Hz
Power consumption in standby mode	0.15 W
Interval flush time, factory setting	5 s

Detection time, factory setting	7 s
Button shape	round

SCOPE OF DELIVERY

- Sigma10 actuator plate
- Mounting frame with infrared control, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Actuator rod
- Fastening material

TO ORDER ADDITIONALLY

- Geberit power supply unit for Power & Connect box

ACCESSORIES

- Geberit remote flush actuator for single flush, Bluetooth®
- Geberit remote flush actuator for dual flush, Bluetooth®

<i>Art. no.</i>	<i>Colour / surface</i>	<i>Product material</i>	<i>B</i> cm	<i>H</i> cm	<i>T</i> cm	<i>Power</i> <i>consumption</i> W	<i>Model</i>
115.890.16.6	Plate, Button: black matt / easy-to-clean coated Design ring/-s: black / glossy	Stainless steel	24.6	16.4	1.5	≤ 4	dual flush
115.890.DW.6	Plate, Button: black / glossy Design ring/-s: black matt	Stainless steel	24.6	16.4	1.5	≤ 4	dual flush
115.890.SN.6	Plate, Button: brushed, easy-to-clean coated Design ring: polished	Stainless steel	24.6	16.4	1.5	≤ 4	dual flush