



Vent Free Gas Logs

MAJESTIC 

Vent Free Gas Logs

Just like the vented gas logs, our vent free gas logs from Majestic are incredibly realistic. Choose from a variety of life-like wood styles and textures to create the perfect fire without the hassle of real wood.

A simple and safe alternative that doesn't require venting, a vent free gas log set from Majestic can be installed just about anywhere to add warmth to chilly rooms and beauty to your home.



EYF-R Mountain Oak refractory cement



EYF-F Charred Hickory ceramic fiber

Give people a place to gather – make fire the focal point of your room again with our wide variety of gas logs from Majestic.



VL Splendor Glow II ceramic fiber



VL Traditional refractory cement



HO-R Highland Oak refractory cement. Highland Oak available in refractory cement and ceramic fiber models. Refractory cement image is shown




BOCL Blazing Oak ceramic fiber



SHCL Ember Burner Seasoned Hardwood ceramic fiber



NBST27 Natural Blaze See-Thru ceramic fiber

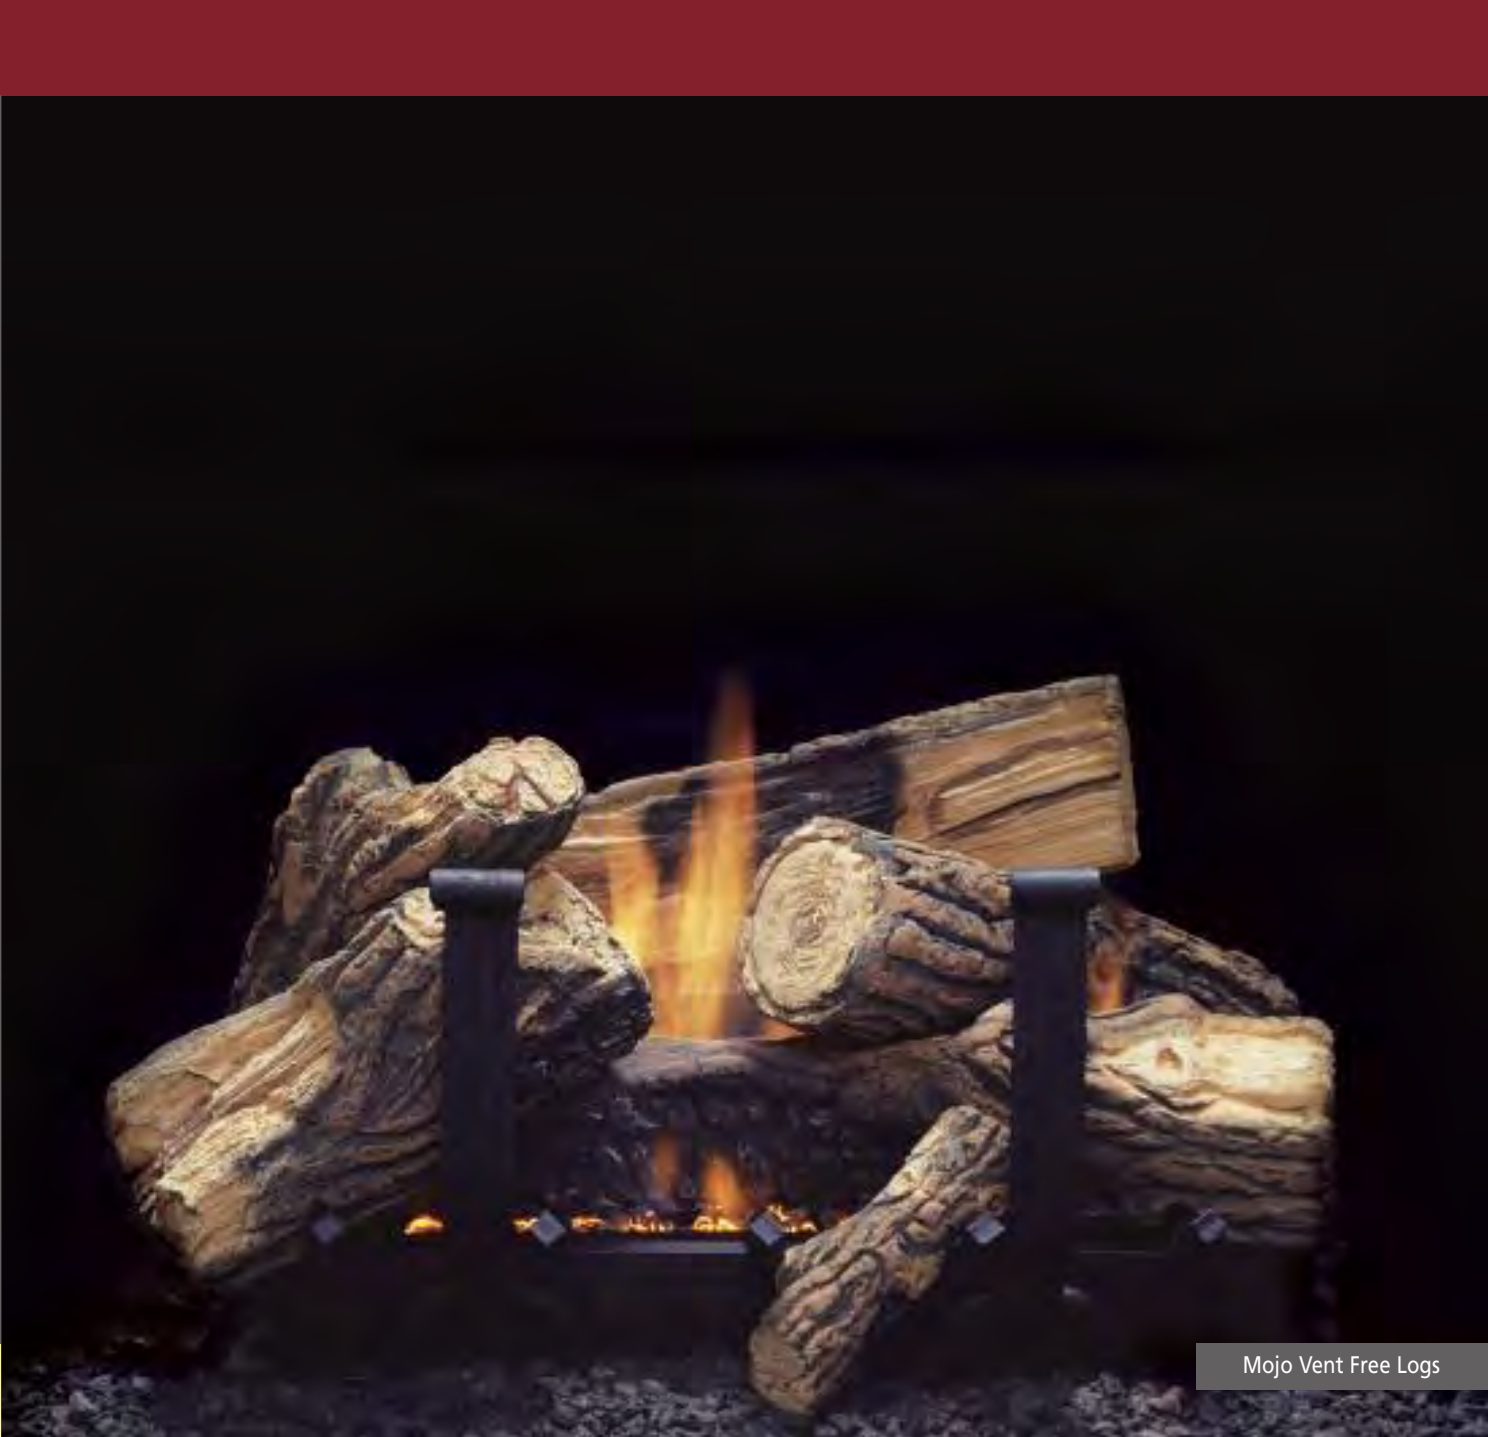

Mojo Vent Free Logs

MOJO Vent Free Logs

Safe, efficient, appealing. The Mojo vent free log set from Majestic offers up to 38,000 BTUs, instant dancing yellow flames, flickering embers and standard grate and andirons that lends an incredibly realist look without the hassle of a real wood fire. With a remarkable 99% efficiency rating, you get 99 cents worth of heat for every dollar spent on fuel, making the Mojo the perfect choice to add some Mojo to your room and to your pocket.

STANDARD FEATURES FOR MOJO:

- Natural Blaze burn system produces instant dancing yellow flames and ember bed
- Hi/lo thermostatic remote control comes standard
- Up to 38,000 BTU
- 99% efficient
- Comes standard with grate and 13" forged andirons
- Massive random stack fiber log set
- Millivolt operation
- Piezo ignitor
- Natural or propane gas
- Includes: volcanic rock, rock wool and flickering embers
- CSA design certified

Optional Accessories



See our Ambient Technologies® catalog for a complete line of remotes and thermostats.



Brass adjustable hood (28" - 48")



Flat black adjustable hood (28" - 48")



Log switch with 12" wire



Ember remote receiver cover



Metal insulated remote receiver cover



Cinders



Decorative fiber ember kit




Decorative grate + Decorative andirons



Vent Free Gas Logs

| Model | Fuel Type | Front A | Minimum Hearth Area Depth B | Back C | Height D | BTU/H Manual Control | BTU/H Millivolt Control | Approx. Heating Area (sq. ft.) |
|---------------------------|-----------|---------|-----------------------------|---------|----------|----------------------|-------------------------|--------------------------------|
| VENT FREE GAS LOGS | | | | | | | | |
| VL18G/R | NG | 27" | 13 1/4" | 18" | 17" | 18,000-28,000 | 18,000-28,000 | 950 |
| VL18G/R | LP | 27" | 13 1/4" | 18" | 17" | 18,000-28,000 | 20,000-28,000 | 950 |
| VL24G/R | NG | 28 1/2" | 13 1/4" | 22 1/4" | 17" | 20,000-34,000 | 25,000-34,000 | 1,300 |
| VL24G/R | LP | 28 1/2" | 13 1/4" | 22 1/4" | 17" | 20,000-34,000 | 30,000-34,000 | 1,300 |
| VL30G/R | NG | 32 1/2" | 13 1/4" | 25 1/2" | 17" | 20,000-34,000 | 25,000-34,000 | 1,300 |
| VL30G/R | LP | 32 1/2" | 13 1/4" | 25 1/2" | 17" | 20,000-34,000 | 30,000-34,000 | 1,300 |
| EYF18-R | NG | 25" | 13" | 17 1/2" | 17" | 18,000-30,000 | 20,000-30,000 | 1,000 |
| EYF18-R | LP | 25" | 13" | 17 1/2" | 17" | 22,500-30,000 | 24,500-30,000 | 1,000 |
| EYF24-R | NG | 29" | 13" | 19 1/2" | 17" | 19,000-36,000 | 24,000-36,000 | 1,100 |
| EYF24-R | LP | 29" | 13" | 19 1/2" | 17" | 25,000-36,000 | 29,000-36,000 | 1,100 |
| EYF24-F | NG | 29" | 13" | 19 1/2" | 17" | 19,000-36,000 | 24,000-36,000 | 1,100 |
| EYF24-F | LP | 29" | 13" | 19 1/2" | 17" | 25,000-36,000 | 29,000-36,000 | 1,100 |
| BOCL18 | NG | 26" | 13" | 18" | 17" | - | 19,000-28,000 | 950 |
| BOCL18 | LP | 26" | 13" | 18" | 17" | - | 23,000-28,000 | 950 |
| BOCL24 | NG | 29" | 13" | 22 1/4" | 17" | - | 26,000-38,000 | 1,300 |
| BOCL24 | LP | 29" | 13" | 22 1/4" | 17" | - | 26,000-34,000 | 1,300 |
| BOCL30 | NG | 33" | 13" | 25 1/4" | 17" | - | 26,000-38,000 | 1,300 |
| BOCL30 | LP | 33" | 13" | 25 1/4" | 17" | - | 26,000-34,000 | 1,300 |
| SHCL18 | NG | 27" | 13 1/4" | 18" | 17" | - | 18,000-28,000 | 950 |
| SHCL18 | LP | 27" | 13 1/4" | 18" | 17" | - | 20,000-28,000 | 950 |
| SHCL24 | NG | 29 1/2" | 13 1/4" | 22 1/4" | 17" | - | 24,000-36,000 | 1,200 |
| SHCL24 | LP | 29 1/2" | 13 1/4" | 22 1/4" | 17" | - | 27,000-36,000 | 1,200 |
| SHCL30 | NG | 34 1/2" | 13 1/4" | 25 1/2" | 17" | - | 24,000-36,000 | 1,200 |
| SHCL30 | LP | 34 1/2" | 13 1/4" | 25 1/2" | 17" | - | 27,000-36,000 | 1,200 |
| HO18-R | NG | 26" | 13" | 18" | 17" | - | 19,000-28,000 | 950 |
| HO18-R | LP | 26" | 13" | 18" | 17" | - | 22,000-27,000 | 950 |
| HO24-R | NG | 29" | 13" | 22 1/4" | 17" | - | 25,000-37,000 | 1300 |
| HO24-R | LP | 29" | 13" | 22 1/4" | 17" | - | 28,000-37,000 | 1300 |
| HO30-R | NG | 33" | 13" | 25 1/4" | 17" | - | 25,000-37,000 | 1300 |
| HO30-R | LP | 33" | 13" | 25 1/4" | 17" | - | 28,000-36,000 | 1300 |
| HO18-F | NG | 26" | 13" | 18" | 17" | - | 19,000-28,000 | 950 |
| HO18-F | LP | 26" | 13" | 18" | 17" | - | 22,000-27,000 | 950 |
| HO24-F | NG | 29" | 13" | 22 1/4" | 17" | - | 25,000-37,000 | 1300 |
| HO24-F | LP | 29" | 13" | 22 1/4" | 17" | - | 28,000-37,000 | 1300 |
| HO30-F | NG | 33" | 13" | 25 1/4" | 17" | - | 25,000-37,000 | 1300 |
| HO30-F | LP | 33" | 13" | 25 1/4" | 17" | - | 28,000-36,000 | 1300 |
| NBST27 | NG | 32" | 21" | - | 21 1/2" | - | 26,000-39,000 | 1400 |
| NBST27 | LP | 32" | 21" | - | 21 1/2" | - | 30,000-39,000 | 1400 |
| MJ27NR | NG | 30" | 14" | 27" | 19" | - | 25,500-38,000 | 1300 |
| MJ27PR | LP | 30" | 14" | 27" | 19" | - | 29,500-37,000 | 1250 |

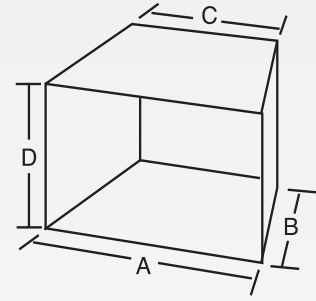

For more information about MHSC and Majestic efficient and environmentally friendly products, please visit www.majesticproducts.com



MAJESTIC

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.majesticproducts.com

Your Majestic Dealer:

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2010 Monessen Hearth Systems Co.