

WIRING INSTRUCTIONS


TITLE

PISTOL GRIP TOOLS

MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD, WIS.

DATE
Feb.'93

**BULLETIN
58-01-0023**

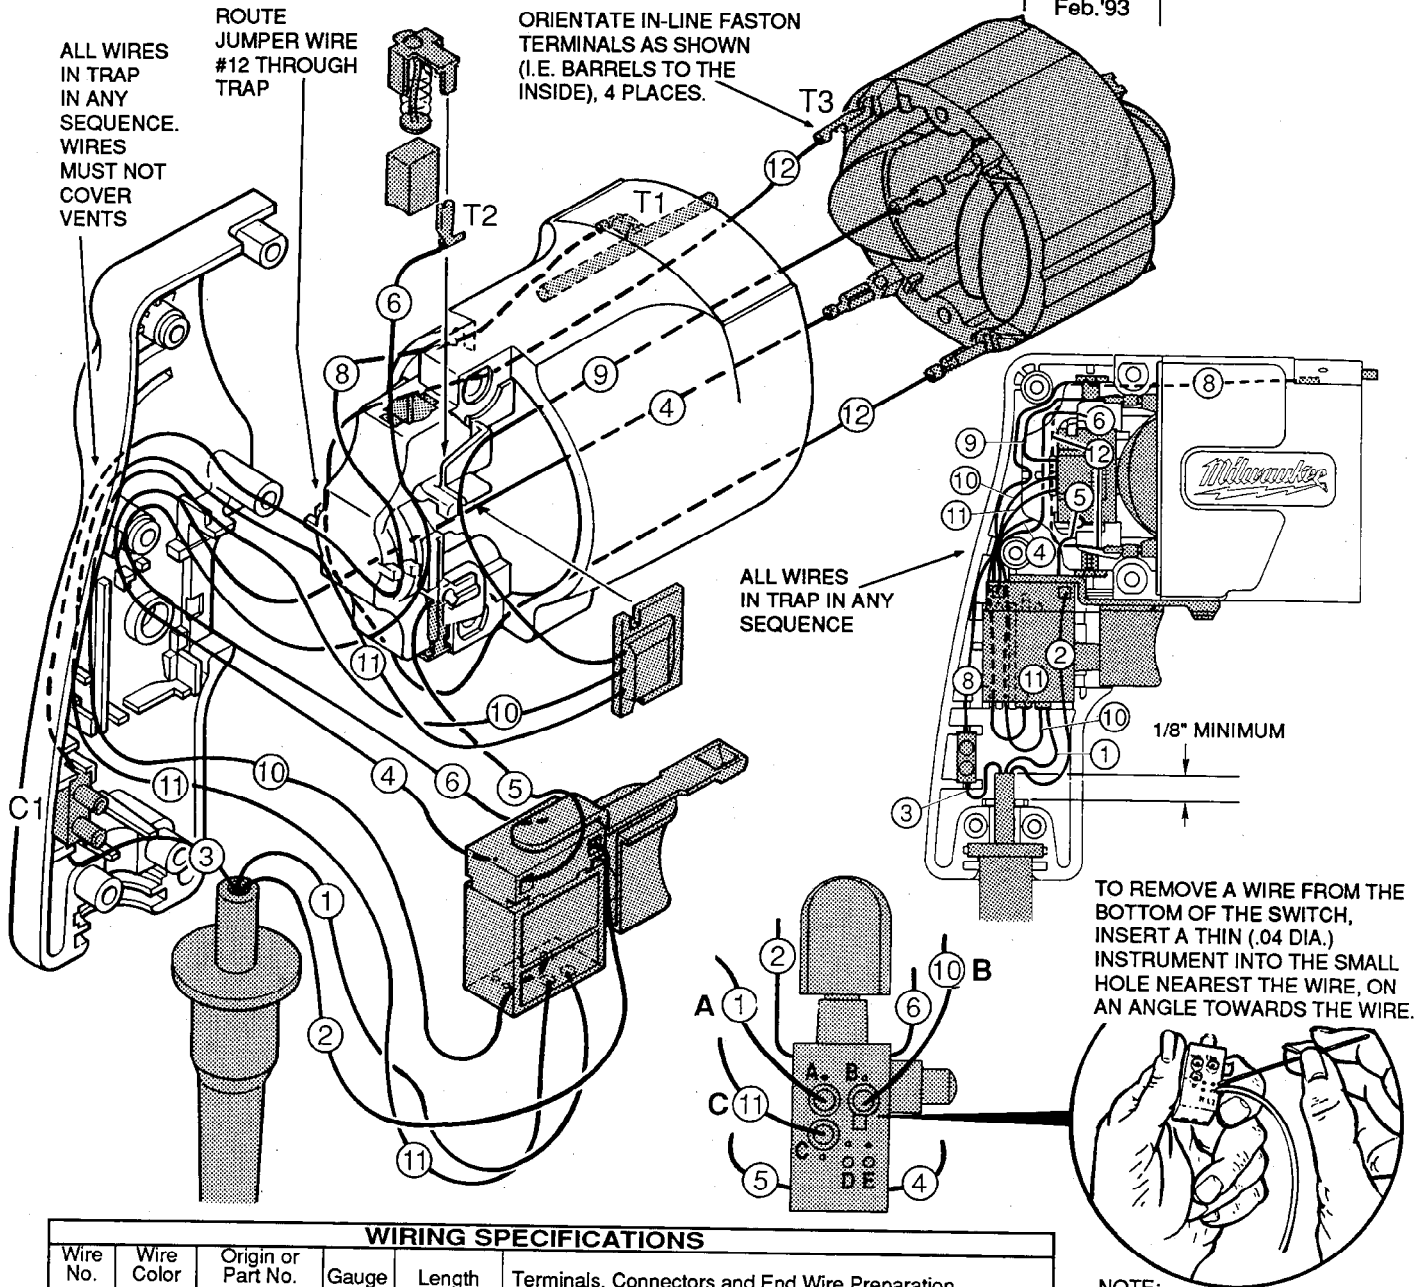

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Part No.	Gauge	Length	Terminals, Connectors and End Wire Preparation
1	Black	Cord	18	1-1/2"	Strip 5/16" and tin.
2	White	Cord	18	2-3/4"	Strip 3/16" and tin.
▲ 3	Green	Cord	18	1-1/2"	Strip 3/16" for C1.
4	Blue	23-94-6270	18*	3-1/8"	Strip 5/32" for T3 / Strip 3/16" and tin.
5	White	23-94-6280	18*	3-1/8"	Strip 3/16" for T2 / Strip 3/16" and tin.
6	Black	23-94-6275	18*	4-1/2"	Strip 3/16" for T2 / Strip 3/16" and tin.
▲ 8	Green	23-94-6225	16*	9-1/2"	Strip 3/16" for T1 / Strip 3/16" for C1.
9	Black	Module	18*	1-5/8"	Strip 5/32" for T3.
10	Black	Module	18*	6-3/8"	Strip 5/16" and tin.
11	Blue	Module	18*	6-3/8"	Strip 5/16" and tin.
12	Black	23-94-6265	18*	3-3/4"	Strip 5/32" for T3 on both ends.

BULK LEAD WIRE - BULLETIN 58-01-0003

▲ FOR DOUBLE INSULATED, DISREGARD WIRES AND TERMINALS

NOTE:
All leads must be held to ± 1/8".
All lead lengths are before stripping.

TERMINAL DESCRIPTION

Code	Part No.	Qty.
▲ T1	23-74-0605	1
T2	23-74-0900	2
T3	23-74-1060	4

CONNECTOR DESCRIPTION

▲ C1	22-56-0456	1
------	------------	---