

## DESCRIPTION

- Various finishes identified by suffix
- Handheld shower
- 69" double interlock spiral hose (metal)
- Double check valve in handle
- 30" slide bar with push button height selection

## OPERATION

- Single function
- Handshower holder rotates to adjust angle of handshower

## FLOW


- EP suffix models are limited to 1.75 gpm (6.7 L/min) max.
- EP15 suffix models are limited to 1.5 gpm (5.76 L/min) max.

## STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1 and ASSE 1014 and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense®
- EP15 suffix models are third party certified to WaterSense®

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a multifamily installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

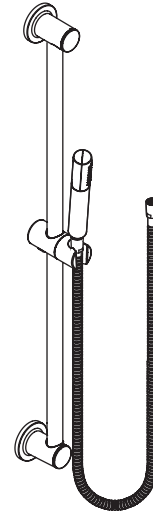

## Single Function Handshower w/Slide Bar

**MODELS:** 3887 Series

