

DESCRIPTION

- Sediment Filter Housing
 - Height: 18-1/16" (459 mm)
 - Width: 7-1/2" (191 mm)
 - Depth: 7-7/8" (200 mm)
- Connection size: 1" NPT
- Includes 1 cartridge, 4.5" (114mm) diameter x 10" (254mm) length
 - Sediment Cartridge: 5 micron melt-blown polypropylene cartridge designed to filter sediment
- Recommended bathrooms: up to 7+

OPERATION


- Replace filter every 6–9 months, depending on water quality
- pH Range: 6.5–9.5
- Pressure: 7.5–80 PSI
- Temperature: 39–113°F
- Flow: up to 20 GPM

STANDARDS

- Third party certified to NSF61 and NSF372

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a residential installation. Visit www.moen.com/support for complete details and limitations

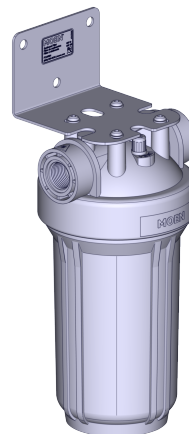

Moen®

10" Sediment Filter Assembly

MODELS: FCAR04

