



# SURFACE MOUNT QUASAR, ELECTRONIC BOTTLE FILLER, NON-REFRIGERATED, DUAL FILTRATION MODEL MWSMF2EBQ

## Suggested Specification

Model MWSMF2EBQ is a non-refrigerated unit. Shall be surface mount in design. Water flow to the bottler filler is by means of an electronically activated solenoid.

QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Shall include the Aqua Pointe™ Bottle Filler with contactless activation and laminar flow. Bottle Filler alcove and cabinet finish shall be stainless steel. Key Aqua Pointe™ bottle filler components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

<b>Features:</b>	· Contactless QUASAR with mercury-free UV-C LED treatment at the dispense point
	· Built-in 100 micron strainer stops particles before they enter the waterway
	· Waterways are Lead-Free in materials & construction
	· High efficiency cooling system
	· Heavy duty galvanized steel frame
	· Contactless activation bottle filler with programmable auto shut off
	· Built-in filter monitor and bottle counter
	· Logos permanently formed into the alcove and stainless steel wrapper
	· LED lighted alcove
	· Built in panel locks for easy access to chiller and filtration

<b>Filtration:</b>	VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, cyst, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons and Remedi Filter.
--------------------	--

<b>Power:</b>	115 Volts, 60 Hz
---------------	------------------

<b>Activation By:</b>	Contactless Sensor
-----------------------	--------------------

<b>Mounting Type:</b>	Wall Mount
-----------------------	------------

<b>Chilling Option:</b>	Non-Refrigerated
-------------------------	------------------

<b>Full Load Amps</b>	0.40 amps
-----------------------	-----------

<b>Rated Watts</b>	25
--------------------	----

<b>Approx. Net Weight</b>	50 lbs
---------------------------	--------

<b>Installation Location:</b>	Indoor
-------------------------------	--------



Ships in multiple boxes.

## Installation

- Prior to rough-in consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Surface mount frame included, but water supply and drain required

## Finishes

- Standard: Stainless Steel Finish

## Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system. Bottle fillers, fountains, and electrical components are warranted for 12 months. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

## Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

## Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

MODEL: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_



**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



Specifications subject to change without notice



SURFACE MOUNT QUASAR, ELECTRONIC BOTTLE  
FILLER, NON-REFRIGERATED, DUAL FILTRATION  
**MODEL MWSMF2EBQ**

**Accessories**



**OASIS VersaFilter III Replacement Cartridge**

OASIS Item #041145-001

- VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons



**OASIS Remedi Replacement Cartridge**

OASIS Item #037406-101


- Remedi filter reduces chlorine, taste and odor reduction, pharmaceutical & chemical waste, heavy metals (copper, iron, lead, tin), cysts, viruses, & bacteria.



[View all filters and accessories](#)



SURFACE MOUNT QUASAR, ELECTRONIC BOTTLE FILLER, NON-REFRIGERATED, DUAL FILTRATION  
**MODEL MWSMF2EBO**

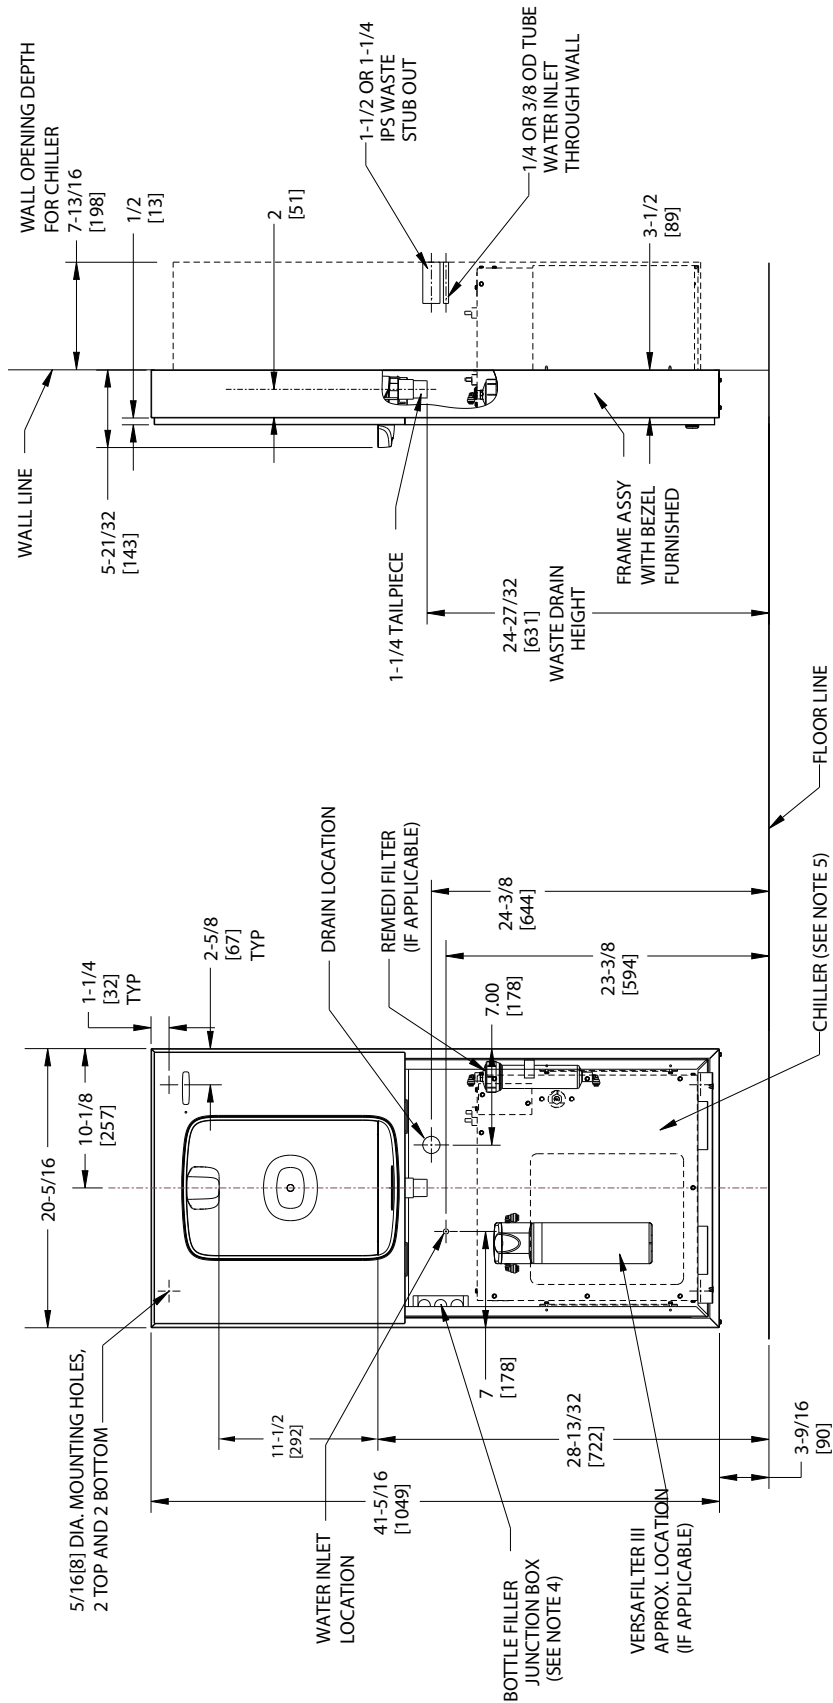

**NOTES:**

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED. SHORT RADIUS TRAP REQUIRED.
3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE IN MILLIMETERS.
4. 115V GROUNDING NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.
5. CHILLER, IF APPLICABLE, MUST BE ADEQUATELY SUPPORTED BY SOMETHING OTHER THAN THE FRAME.
6. FILTER INSTALLATION LOCATIONS WILL VARY BY MODEL.