



FREESTANDING, NON-REFRIGERATED QUASAR ELECTRONIC BOTTLE FILLER, DUAL FILTRATION

MODEL PF2CPEBQ

Suggested Specification

Model PF2CPEBQ is a non-refrigerated bottle filler and delivers ambient water. Shall be freestanding in design with contactless activation for the dispensing of water and laminar flow. Bottle Filler alcove and cabinet finish shall be stainless steel.

QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Plastic bottle filler components contain Freshield, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Evaporator shall be high efficiency tank type and shall be encapsulated in insulation. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.



- | | |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Features: | <ul style="list-style-type: none"> • Contactless QUASAR bottle filler with mercury-free UV-C LED at the dispense point • Built-in 100 micron strainer stops particles before they enter the waterway • Waterways are lead-free in materials & construction • Contactless activation bottle filler with programmable auto shut off • High flow output of 1.1 gallons per minute for faster fill up • Built in drain - no drip tray to empty • Removable front panel for ease of filter change-out (not included) • Built-in filter monitor and bottle counter • Logos permanently formed into the alcove and stainless steel wrapper • LED lighted alcove |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Filtration: VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, cyst, Particulate Class I, chlorine, taste, odor and microplastics reduction to 4,750 gallons and Remedi Filter.

Power:	115 Volts, 60 Hz
Activation By:	Contactless Sensor on Bottle Filler
Mounting Type:	Free Standing
Chilling Option:	Non-refrigerated
Full Load Amps	0.4 amps
Rated Watts	25
Approx. Net Weight	48 lbs
Installation Location:	Indoor

Finishes

- Standard cabinet finish: Stainless steel

Limited 1-Year Warranty

(Continental limits of the United States and Canada)
One year on bottle fillers and electrical components. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

MODEL: _____ QTY: _____

PROJECT: _____

CONTACT: _____

NOTES: _____

APPROVAL: _____ DATE: _____



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Specifications subject to change without notice



FREESTANDING, NON-REFRIGERATED QUASAR
ELECTRONIC BOTTLE FILLER, DUAL FILTRATION
MODEL PF2CPEBQ

Accessories



OASIS VersaFilter III Replacement Cartridge

OASIS Item #041145-001

- Certified to NSF/ANSI 42, 53 and 401 for lead, Particulate Class I, chlorine, taste, odor and microplastics reduction to 4,750 gallons.



OASIS Remedi Replacement Cartridge

OASIS Item #037406-101


- Remedi filter utilizes the principle of electro-adhesion, capable of removing a wide range of water borne contaminants including bacteria, cysts, viruses and some heavy metals.



[View all filters and accessories](#)



FREESTANDING, NON-REFRIGERATED QUASAR
ELECTRONIC BOTTLE FILLER, DUAL FILTRATION
MODEL PF2CPEBQ

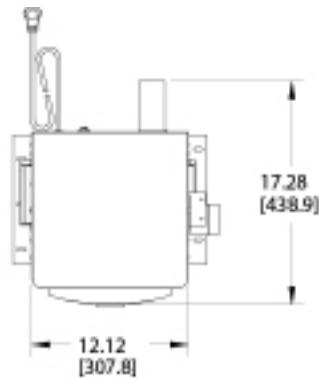


PLAN VIEW

ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS IN BRACKETS []
ARE IN MILLIMETERS.

ALLOW 4" [102] FOR VENTILATION AT THE
REAR OF THE WATER COOLER AND THE
SIDES IF SET IN AN ALCOVE OR NEAR A
CORNER.

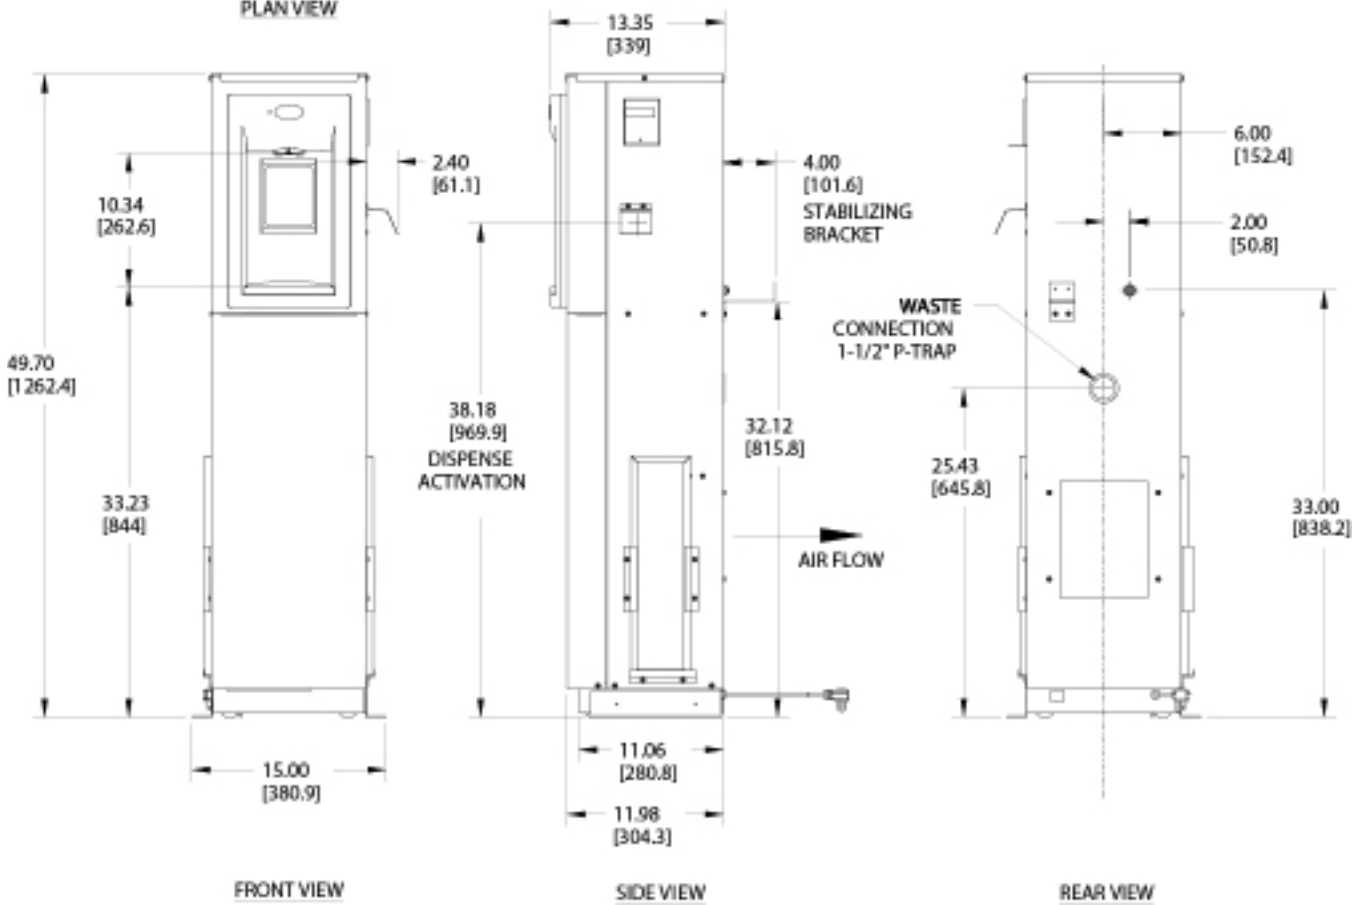

FRONT VIEW

SIDE VIEW

REAR VIEW