

# TOTO®

# MW4742034CUFG

## Vespin® II 1G® / WASHLET®+ C100 Two-Piece Toilet - 1.0 GPF

### FEATURES

- Concealed supply connection for seamless installation.
- Ultra high-efficiency Tornado Flush® (1.0GPF/3.8LPF)
- Skirted design
- CeFiONtect® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- 12" Rough-in, less supply
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever
- See Spec sheet SW2034T20 for Washlet features

### MODELS

- CT474CUFGT20  
Bowl with CeFiONtect glaze
- ST453U Tank and cover only
- ST453UR Tank and cover only, right hand trip lever

### REQUIRED WASHLET+

- SW2034T20 WASHLET®+ C100  
Fits TOTO WASHLET+ toilet bowl models only

### COLORS/FINISHES

- Standard  
#01 Cotton

### OPTIONAL ROUGH-IN

- 10" rough-in      TSU01W.10R
- 14" rough-in      TSU01W.14R

### PRODUCT SPECIFICATION

The two-piece ultra high-efficiency Tornado Flush toilet shall be 1.0GPF/3.8LPF. Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be **TOTO Model CT474CUFGT20#01**.

See TOTO Specification sheet **SW2034T20** for details on required Washlet.



 **CeFiONtect**      **washlet®+**  
 **Tornado Flush**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



# MW4742034CUFG

## Vespin® II 1G® / WASHLET®+ C100 Two-Piece Toilet - 1.0GPF


### SPECIFICATIONS

- Water Use 1.0 GPF/3.8LPF
- Flush System Tornado Flush®
- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4"
- Trap Diameter 2-1/8"
- Rough-in 12" (10" or 14" optional)
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT474CUFGT20 57.3lbs.  
ST453U(R) 28.0lbs.  
SW2034T20 16.0lbs.
- Shipping Dimensions CT474CUFGT20  
30-1/8" L x 16-3/4" W x 22" H  
ST453U(R)  
18" L X 9" W X 16" H  
SW2034T20  
23 1/2" X 20 1/2" X 9"
- See Spec sheet **SW2034T20** for Washlet details

### INSTALLATION NOTES


#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

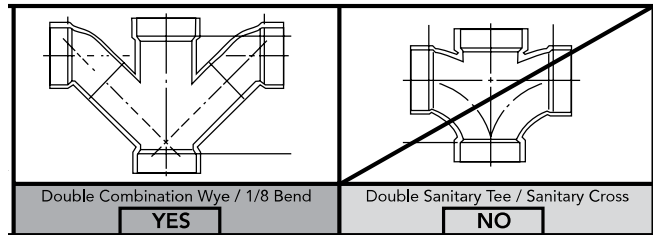

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

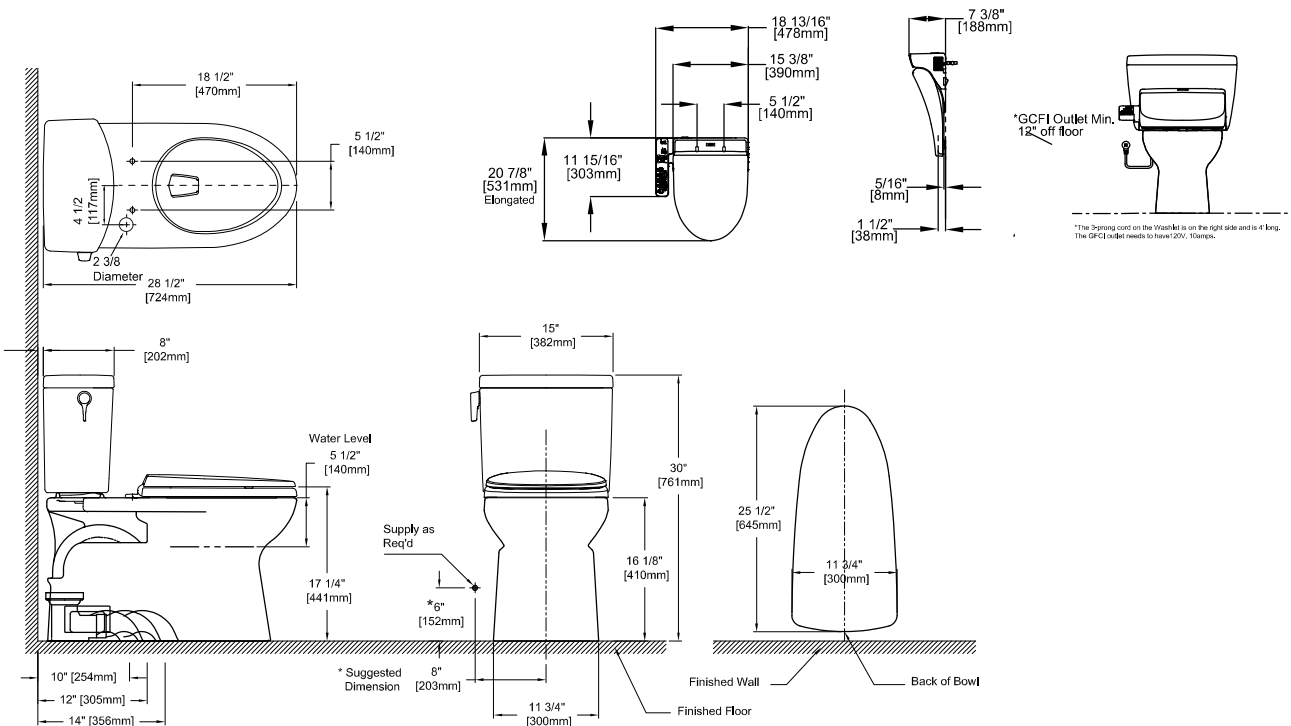

**TOTO**

*These dimensions and specifications are subject to change without notice*