

DUOFIT® In-Wall Tank Unit, 1.28 GPF & 0.9 GPF

FEATURES

- Dual Flushing system, low consumption (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF)
- Auto Flush function capability
- Adjustable 15"-19" mounting height
- Support up to 880 lbs.
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- 1-pc blow molded, insulated polyethylene tank to prevent leaks and sweating
- 2" x 6" Polyethylene outlet included
- Pre-plumbed for WASHLET® connection
- Copper supply line

MODELS

- WT173M - with copper WASHLET supply line
- WT173MA - Same as WT173M with Auto Flush connection

Required Push Plates (Sold Separately)

- YT970#SS - Stainless Steel
- YT970#B - Black
- YT970#W - White
- YT970#N - Nickel

Compatible Outlets (Sold Separately)

- THU343 2" x 4" outlet HDPE & PVC
- THU335 2" x 6" outlet cast iron

Compatible Wall Hung Bowls (Sold Separately)

- CT447CFGT60 - RP WASHLET+ Wall-Hung Toilet
- CT449CFGT60 - SP WASHLET+ Wall-Hung Toilet
- CT426CFGT40 - AP WASHLET+ Wall-Hung Toilet
- CT428CFGT40 - EP WASHLET+ Wall-Hung Toilet

PRODUCT SPECIFICATION

This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF & 0.9 GPF. Requires TOTO toilet model CT426CFGT40, CT428CFGT40, CT447CFGT60, and CT449CFGT60. In-Wall tank system shall be TOTO Model WT173M_____.



CODES/STANDARDS

- Meets and exceeds
 - Carrier system: ASME A112.6.2
 - Tank trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO(cUPC), *EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



*WaterSense certification only applies to WT173M(A) when combined with either model CT426CFGT40, CT428CFGT40, CT447CFGT60, and CT449CFGT60 toilet bowls.

WT173M(A)


DUOFIT® In-Wall Tank Unit, 1.28 GPF & 0.9 GPF

SPECIFICATIONS


- Water Use 1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
- Flush System Dual-Max
- Min. Water Pressure 8 psi (static)
- Max. Water Pressure 108.75 psi (static)
- Installation Height 15" to 19" (projected range)
- Warranty One Year Limited Warranty
- Material Various
- Shipping Weight 43 lbs
- Shipping Dimensions 47-1/2" x 26" x 6"

INSTALLATION NOTES

Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.

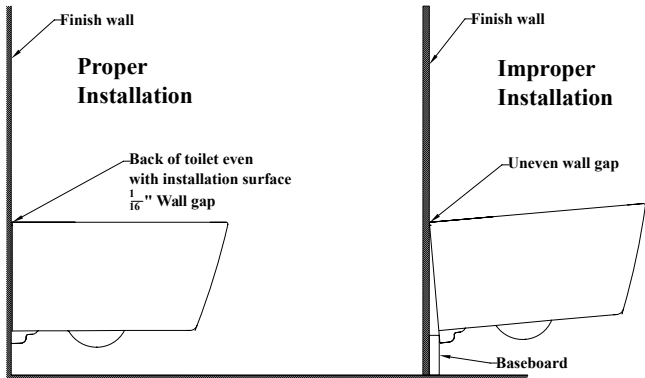

DIMENSIONS

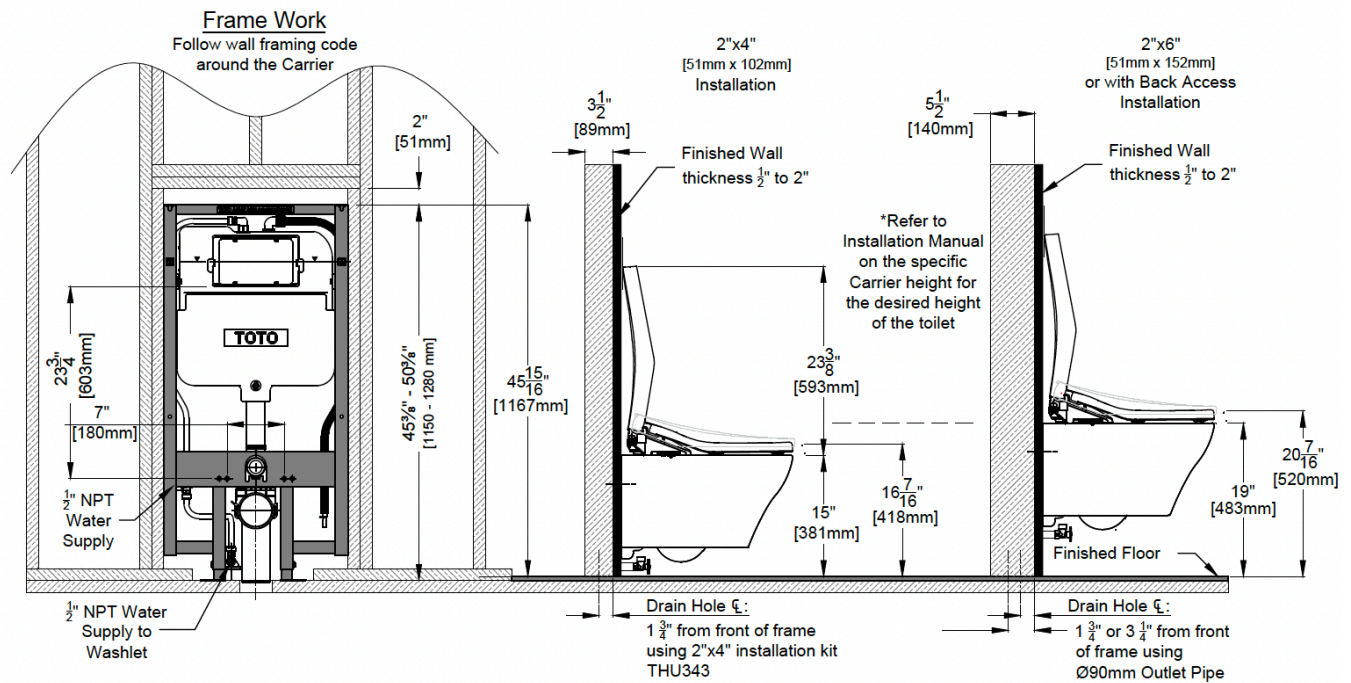

TOTO®

These dimensions and specifications are subject to change without notice