




Architect/Engineering Specifications:

8" concealed deck mount mixing faucet with forged brass body, restricted swing nozzle with 0.5 GPM vandal resistant non-aerator spray device, quarter-turn compression cartridges, lever handles, chrome polished escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF/ANSI 61-Section 9 and NSF/ANSI 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

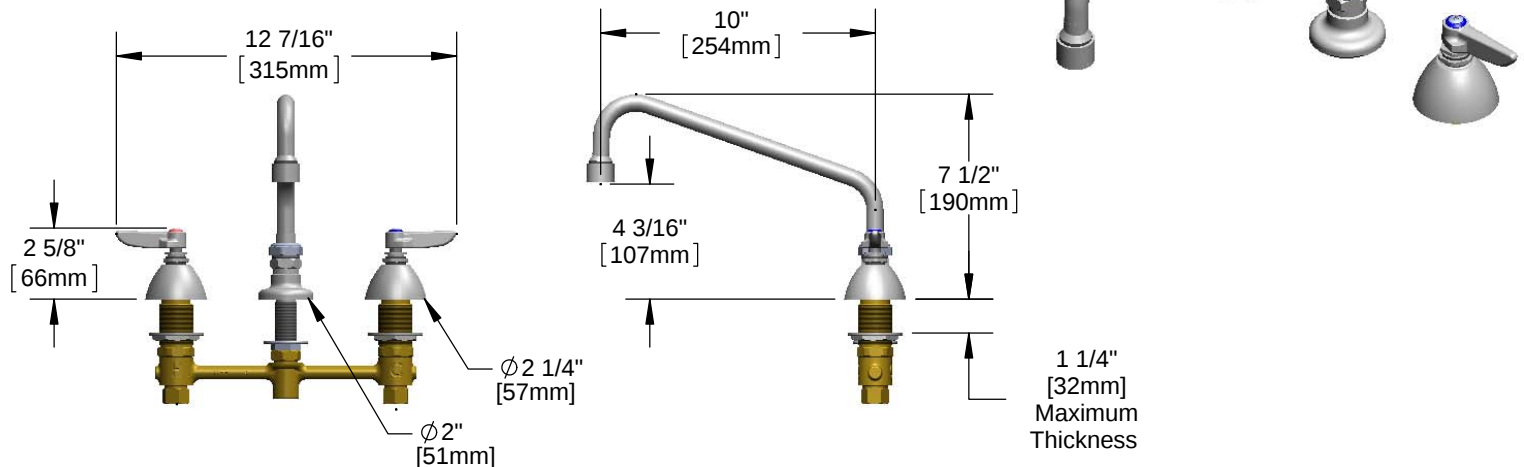

Features & Benefits:

- 8" EasyInstall concealed deck mount mixing faucet w/ forged brass body
- 10" 100° restricted swing nozzle
- 0.5 GPM vandal resistant non-aerator spray device, Series 6 (B-0199-06N-05)
- Lever handles w/ color coded indexes
- Quarter-turn Eterna compression cartridges
- 1/2" NPSM male inlets w/ coupling nuts
- Material: Forged brass body, chrome plated metal handles & polished chrome plated brass escutcheons and tubular spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 0.5 GPM @ 60 psi



ADA Compliant

Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles	Optional Cartridges
0.35	N/A	☐ B-0199-01-N035	N/A	☐ B-0199-06-N035	☐ 4" Wrist Action	☐ Quarter Turn Cerama
0.5	N/A	☐ B-0199-01-N05	N/A	Standard	☐ Lever (Std)	☐ Eterna
1.0	☐ B-0199-01-F10	N/A	☐ B-0199-06-F10	N/A	☐ 4-Arm	☐ Quarter Turn Eterna (Std)
1.5	☐ B-0199-01-WS	☐ B-0199-29	☐ B-0199-06-WS	☐ B-0199-29VR		☐ Push Button Metering
2.2	☐ B-0199-01	☐ B-0199-21	☐ B-0199-06	☐ B-0199-21-VRF		☐ Pivot Action Metering
						☐ Wrist Action Metering

