

Exposed Teck® Flush Valve

TECK®
COMMERCIAL



Specification: (example)

(FOR 1-1/2" TOP INLET CLOSET FIXTURE)

- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush volume adjustment,** (except -48 and -6 models) factory set at 60 PSI to 6 litre (1.6 US gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube and SIS wall flange, spud flange and concealed spud nut

WITH 292mm (11-1/2") LENGTH:

□ 81T201

As above

□ 81T201-1

Same as 81T201, but with trap seal primer tee

□ 81T201-5

Same as 81T201, but with center cover bumper

□ 81T201-6

Same as 81T201, but **Not Field Adjustable**

□ 81T201-48

Same as 81T201, but factory set at 60 PSI to 4.8 litre (1.27 US gal.), **Not Field Adjustable**

□ 81T201-56

Same as 81T201-5, but **Not Field Adjustable**

□ 81T201-548

Same as 81T201-5, but factory set at 60 PSI to 4.8 litre (1.27 US gal.), **Not Field Adjustable**

With 610mm (24") LENGTH

□ 81T221

As above

□ 81T221-1

Same as 81T221 but with trap seal primer tee

□ 81T221-6

Same as 81T221, but **Not Field Adjustable**

□ 81T221-48

Same as 81T221, but factory set at 60 PSI to 4.8 litre (1.27 US gal.), **Not Field Adjustable**



Approvals:

- CSA certified
- Complies to ASSE 1037 
- ADA compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- IAPMO Listed

(Contact Delta Representative for State and/or Local Approvals.)

Engineer/Architect Approval

Model Specified:



Approval:

Date:

Note: Measurements may vary $\pm$ 6mm (0.25")



81T201

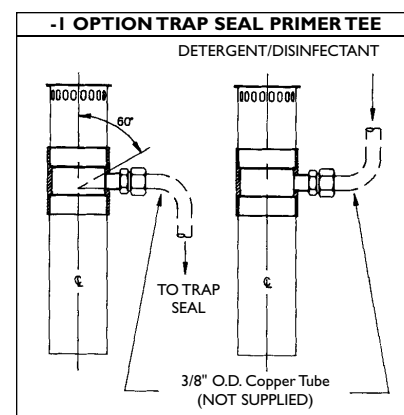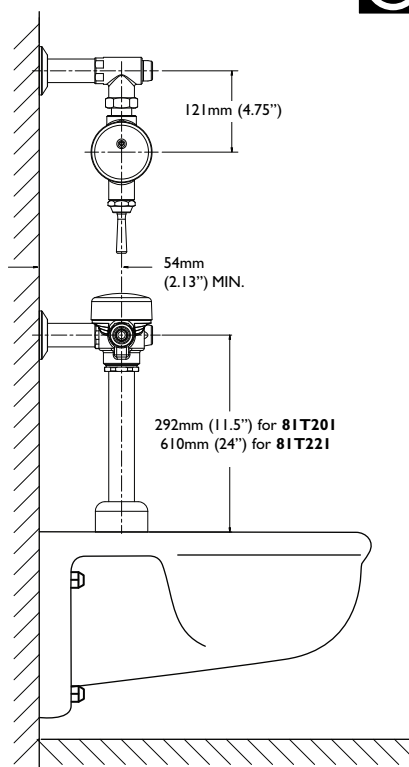

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.
Verify flow requirements with bowl manufacturer.